


MULTI LENS COLOR MIX |||

Core advantage - Linear arrangement of multiple lenses to achieve uniform color mixing without color separation


Wipe the wall and wash the wall 150mm distance



RGBW

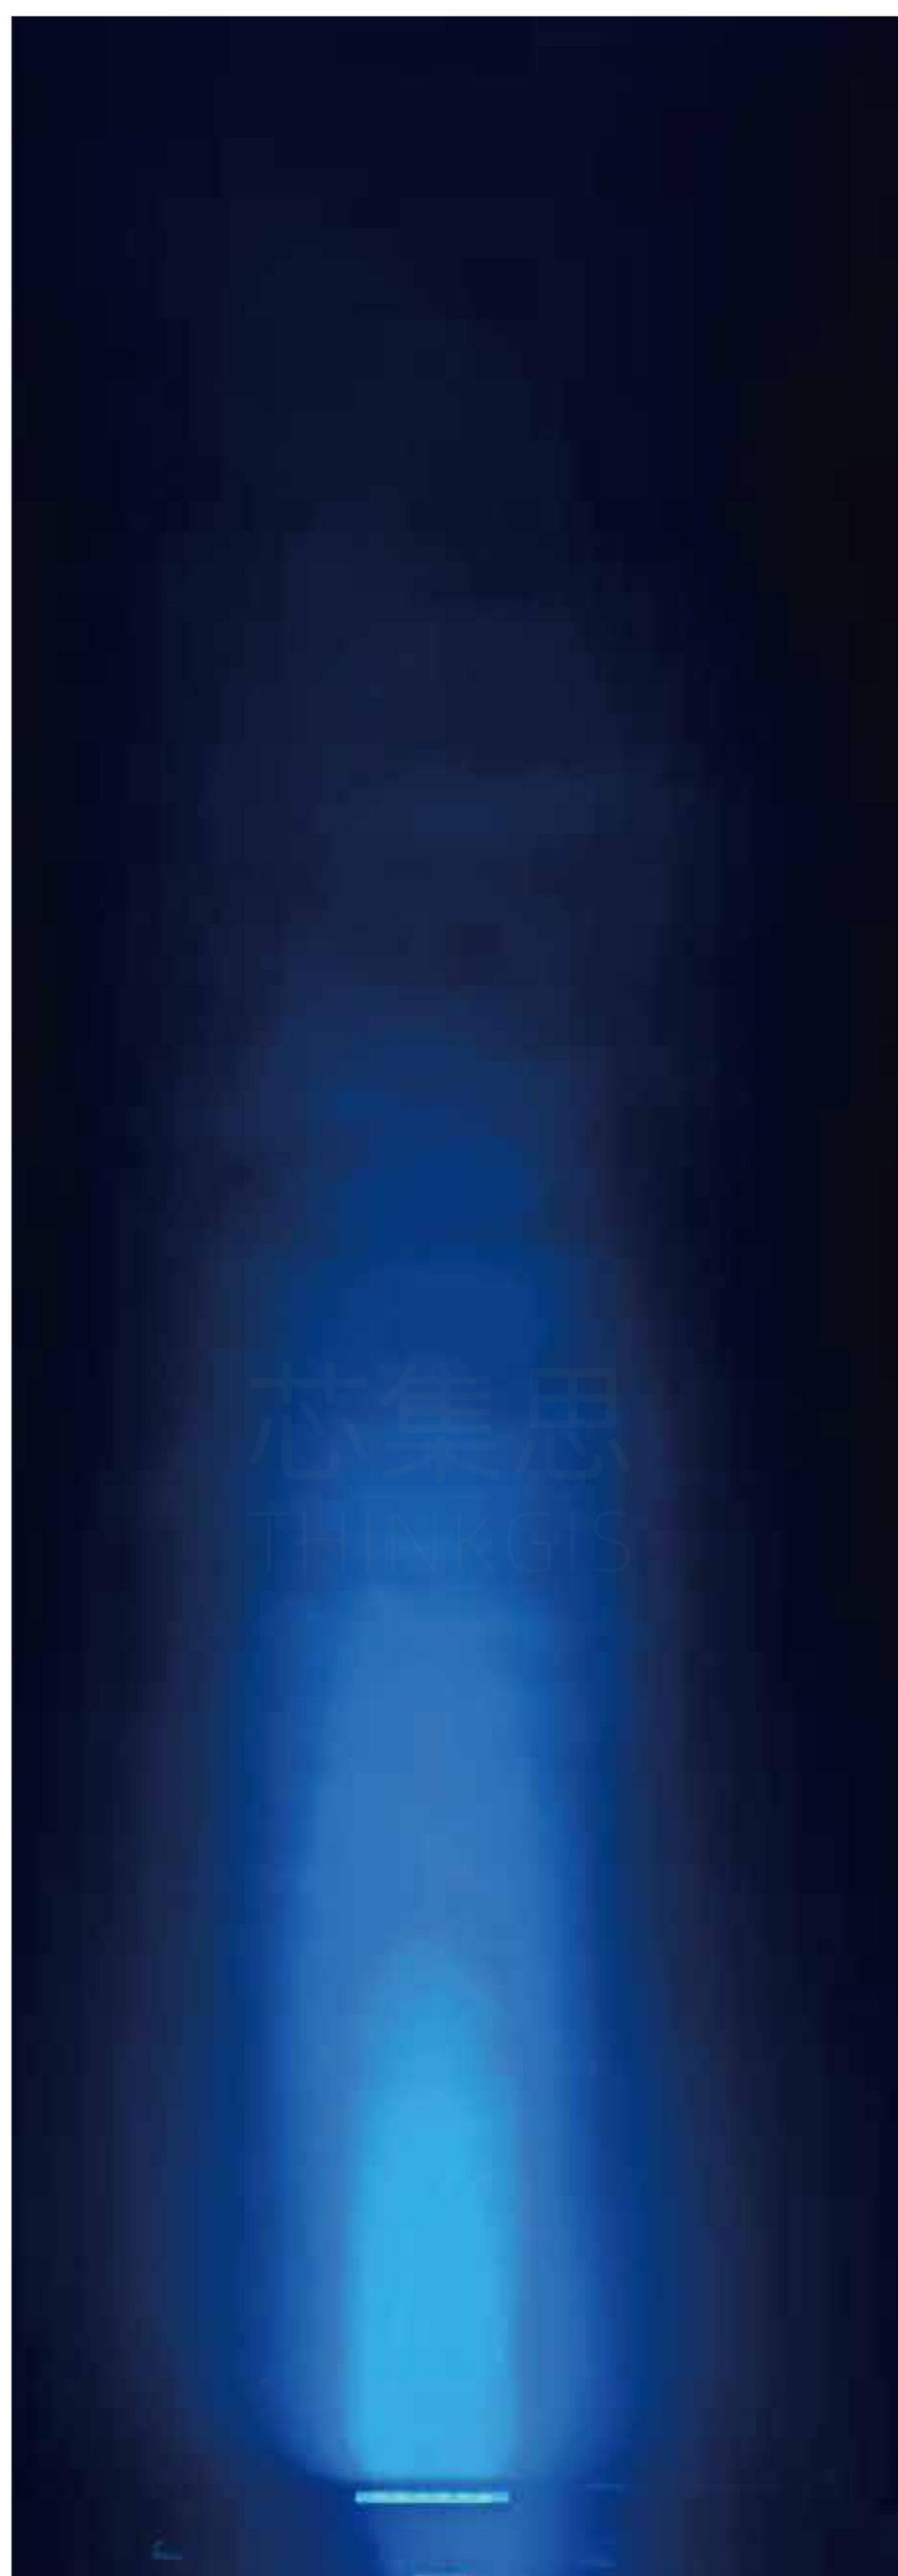

BLUE-GREEN

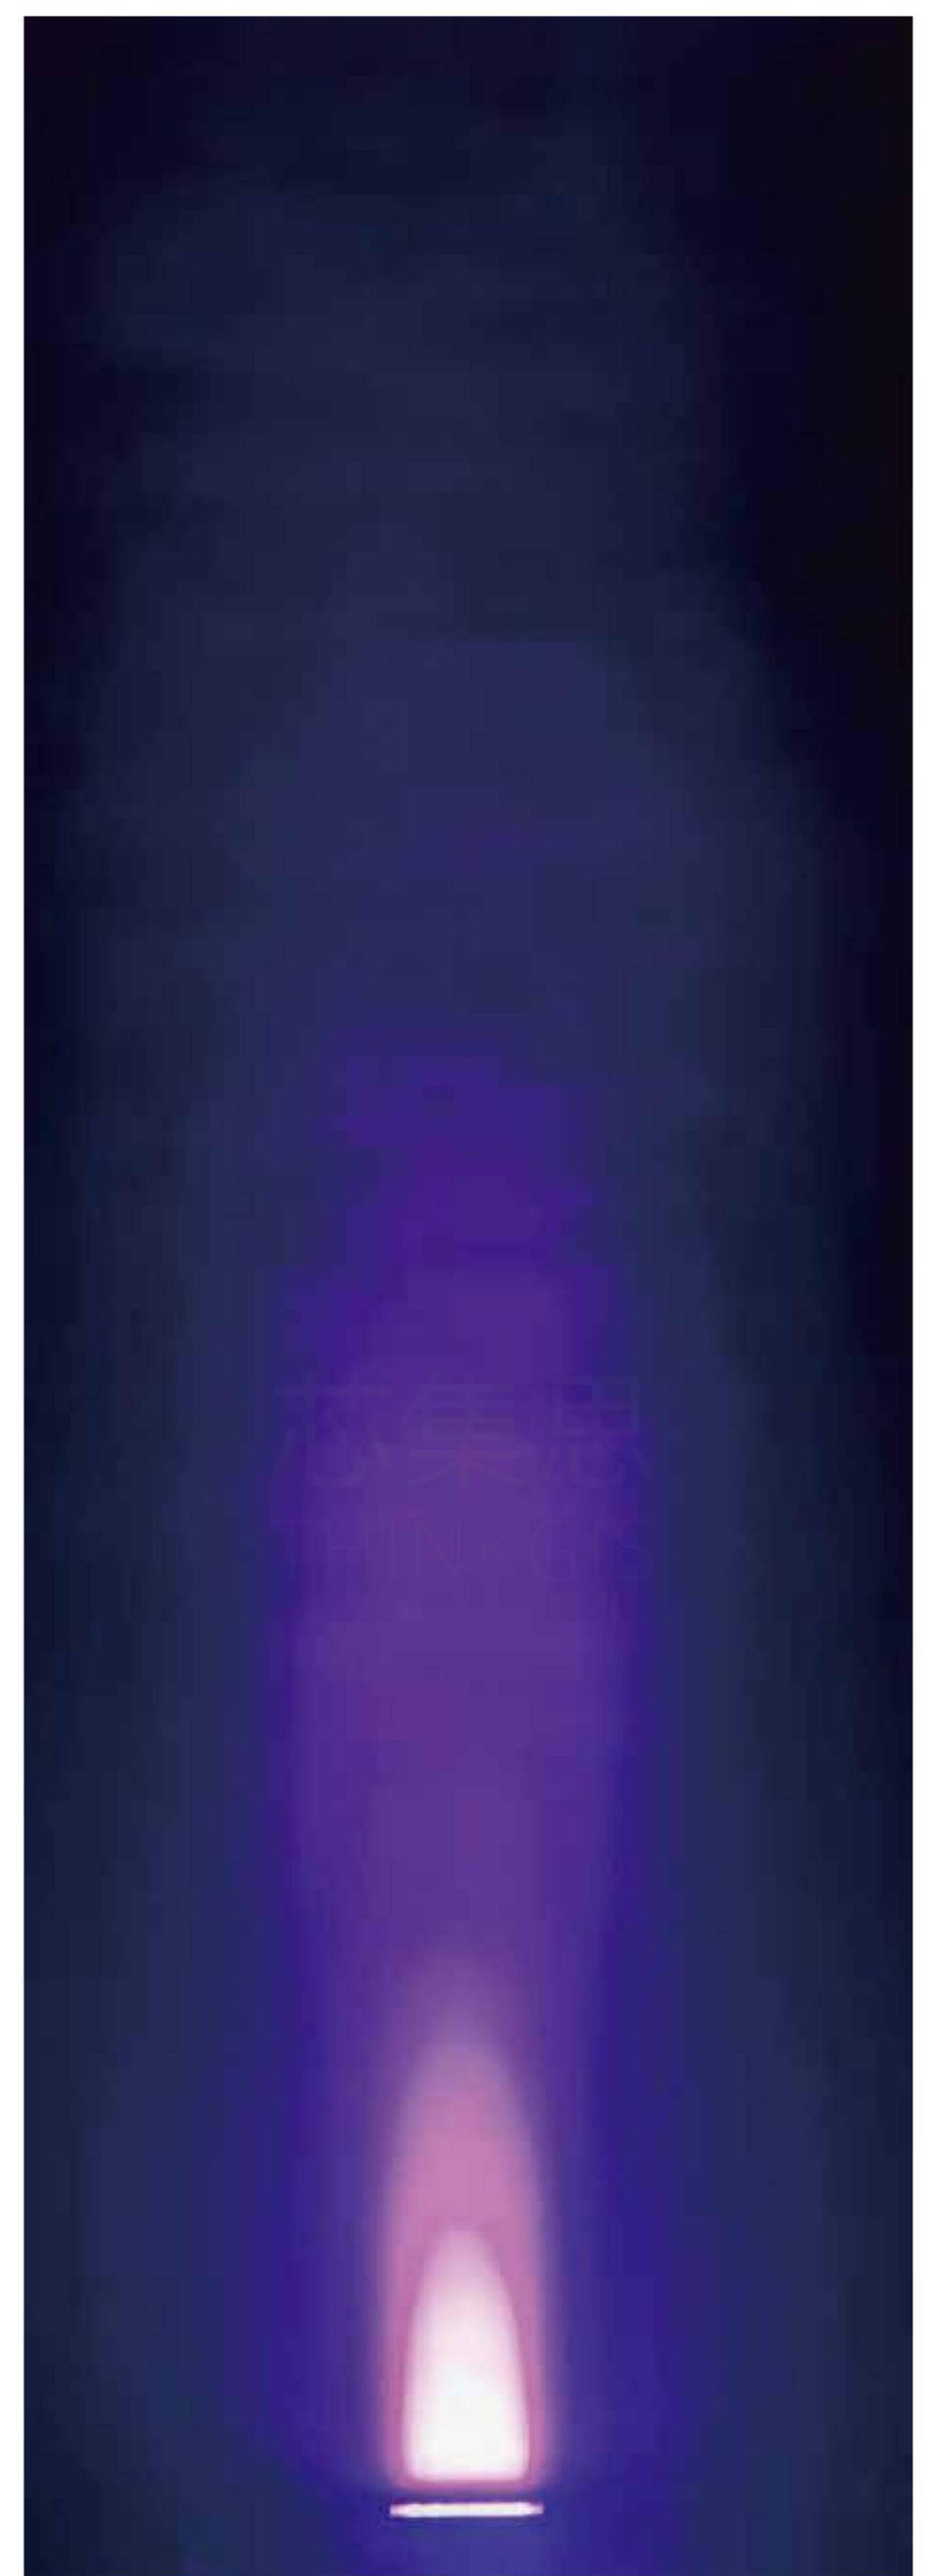

RED-BLUE




||| PARTIAL LOUVRE FOR LINEAR GROUND LIGHT



Core advantage-anti-glare

- Low glare from the human viewpoint;
- High efficiency in the light direction of the illuminated surface;


|| PARTIAL LOUVRE FOR VERTICAL LIGHT

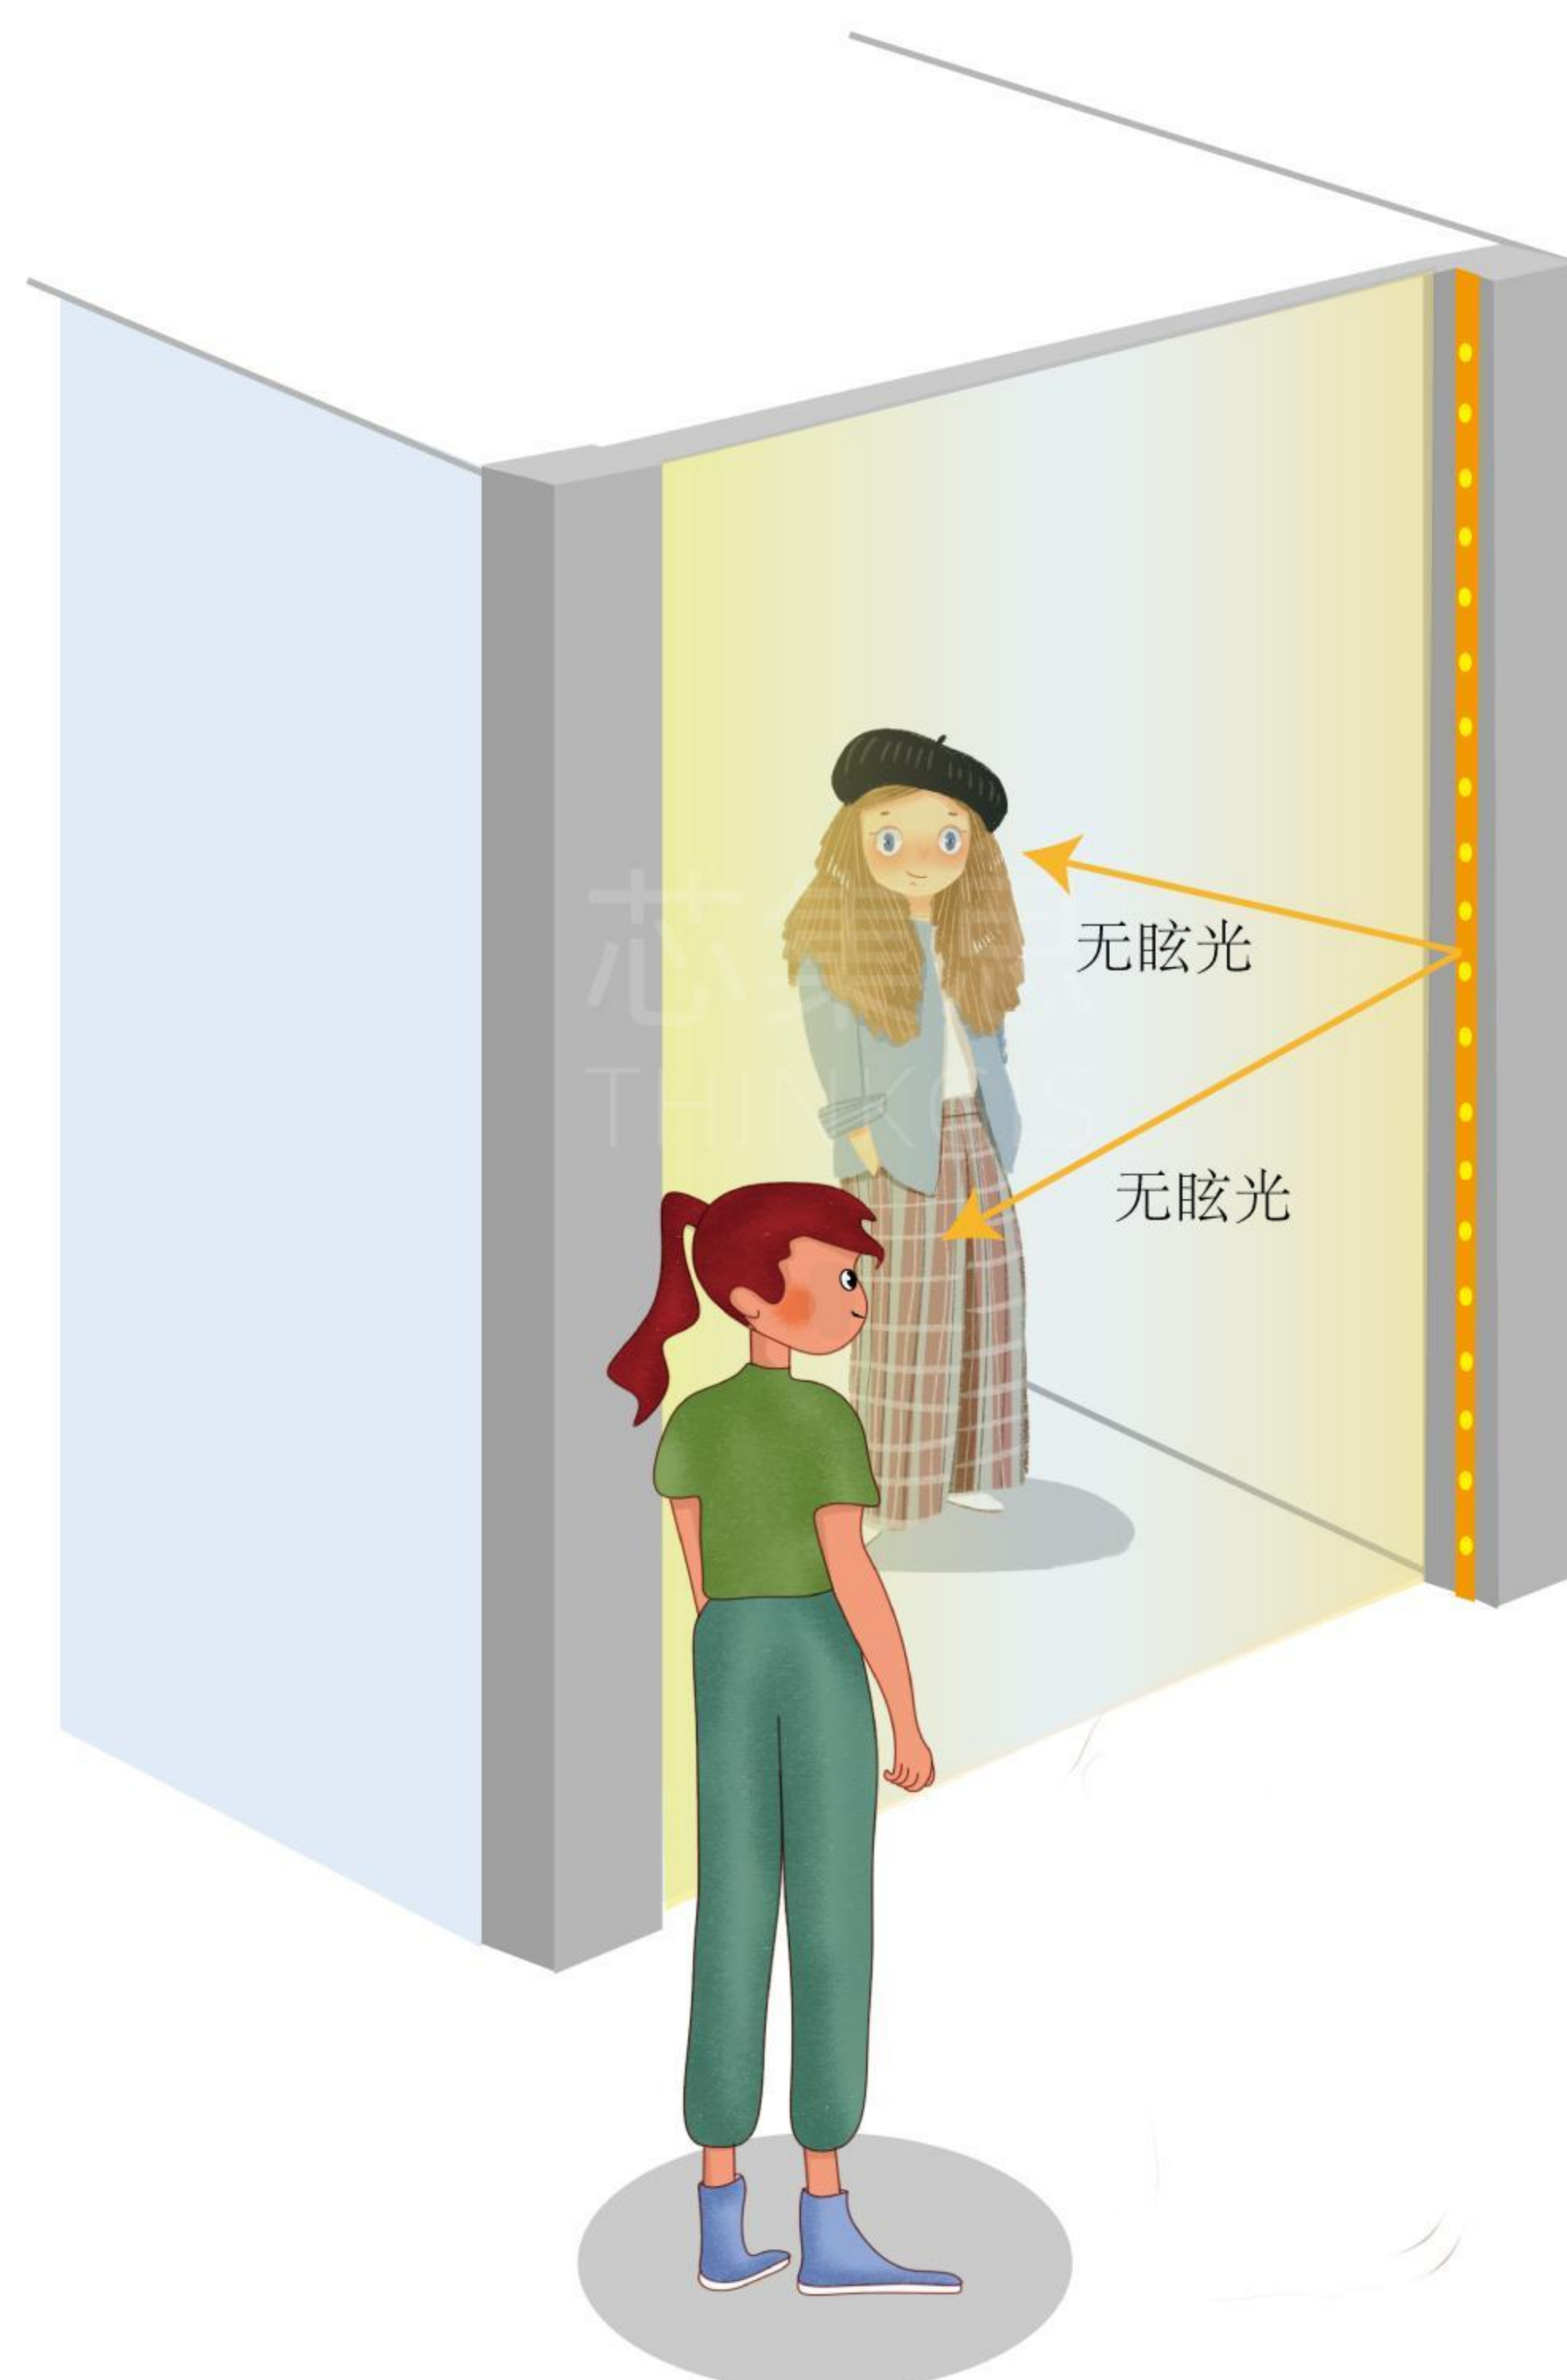

Core advantages

- Low glare to passersby
- Low glare to indoors

Linear Ground Light With Frame

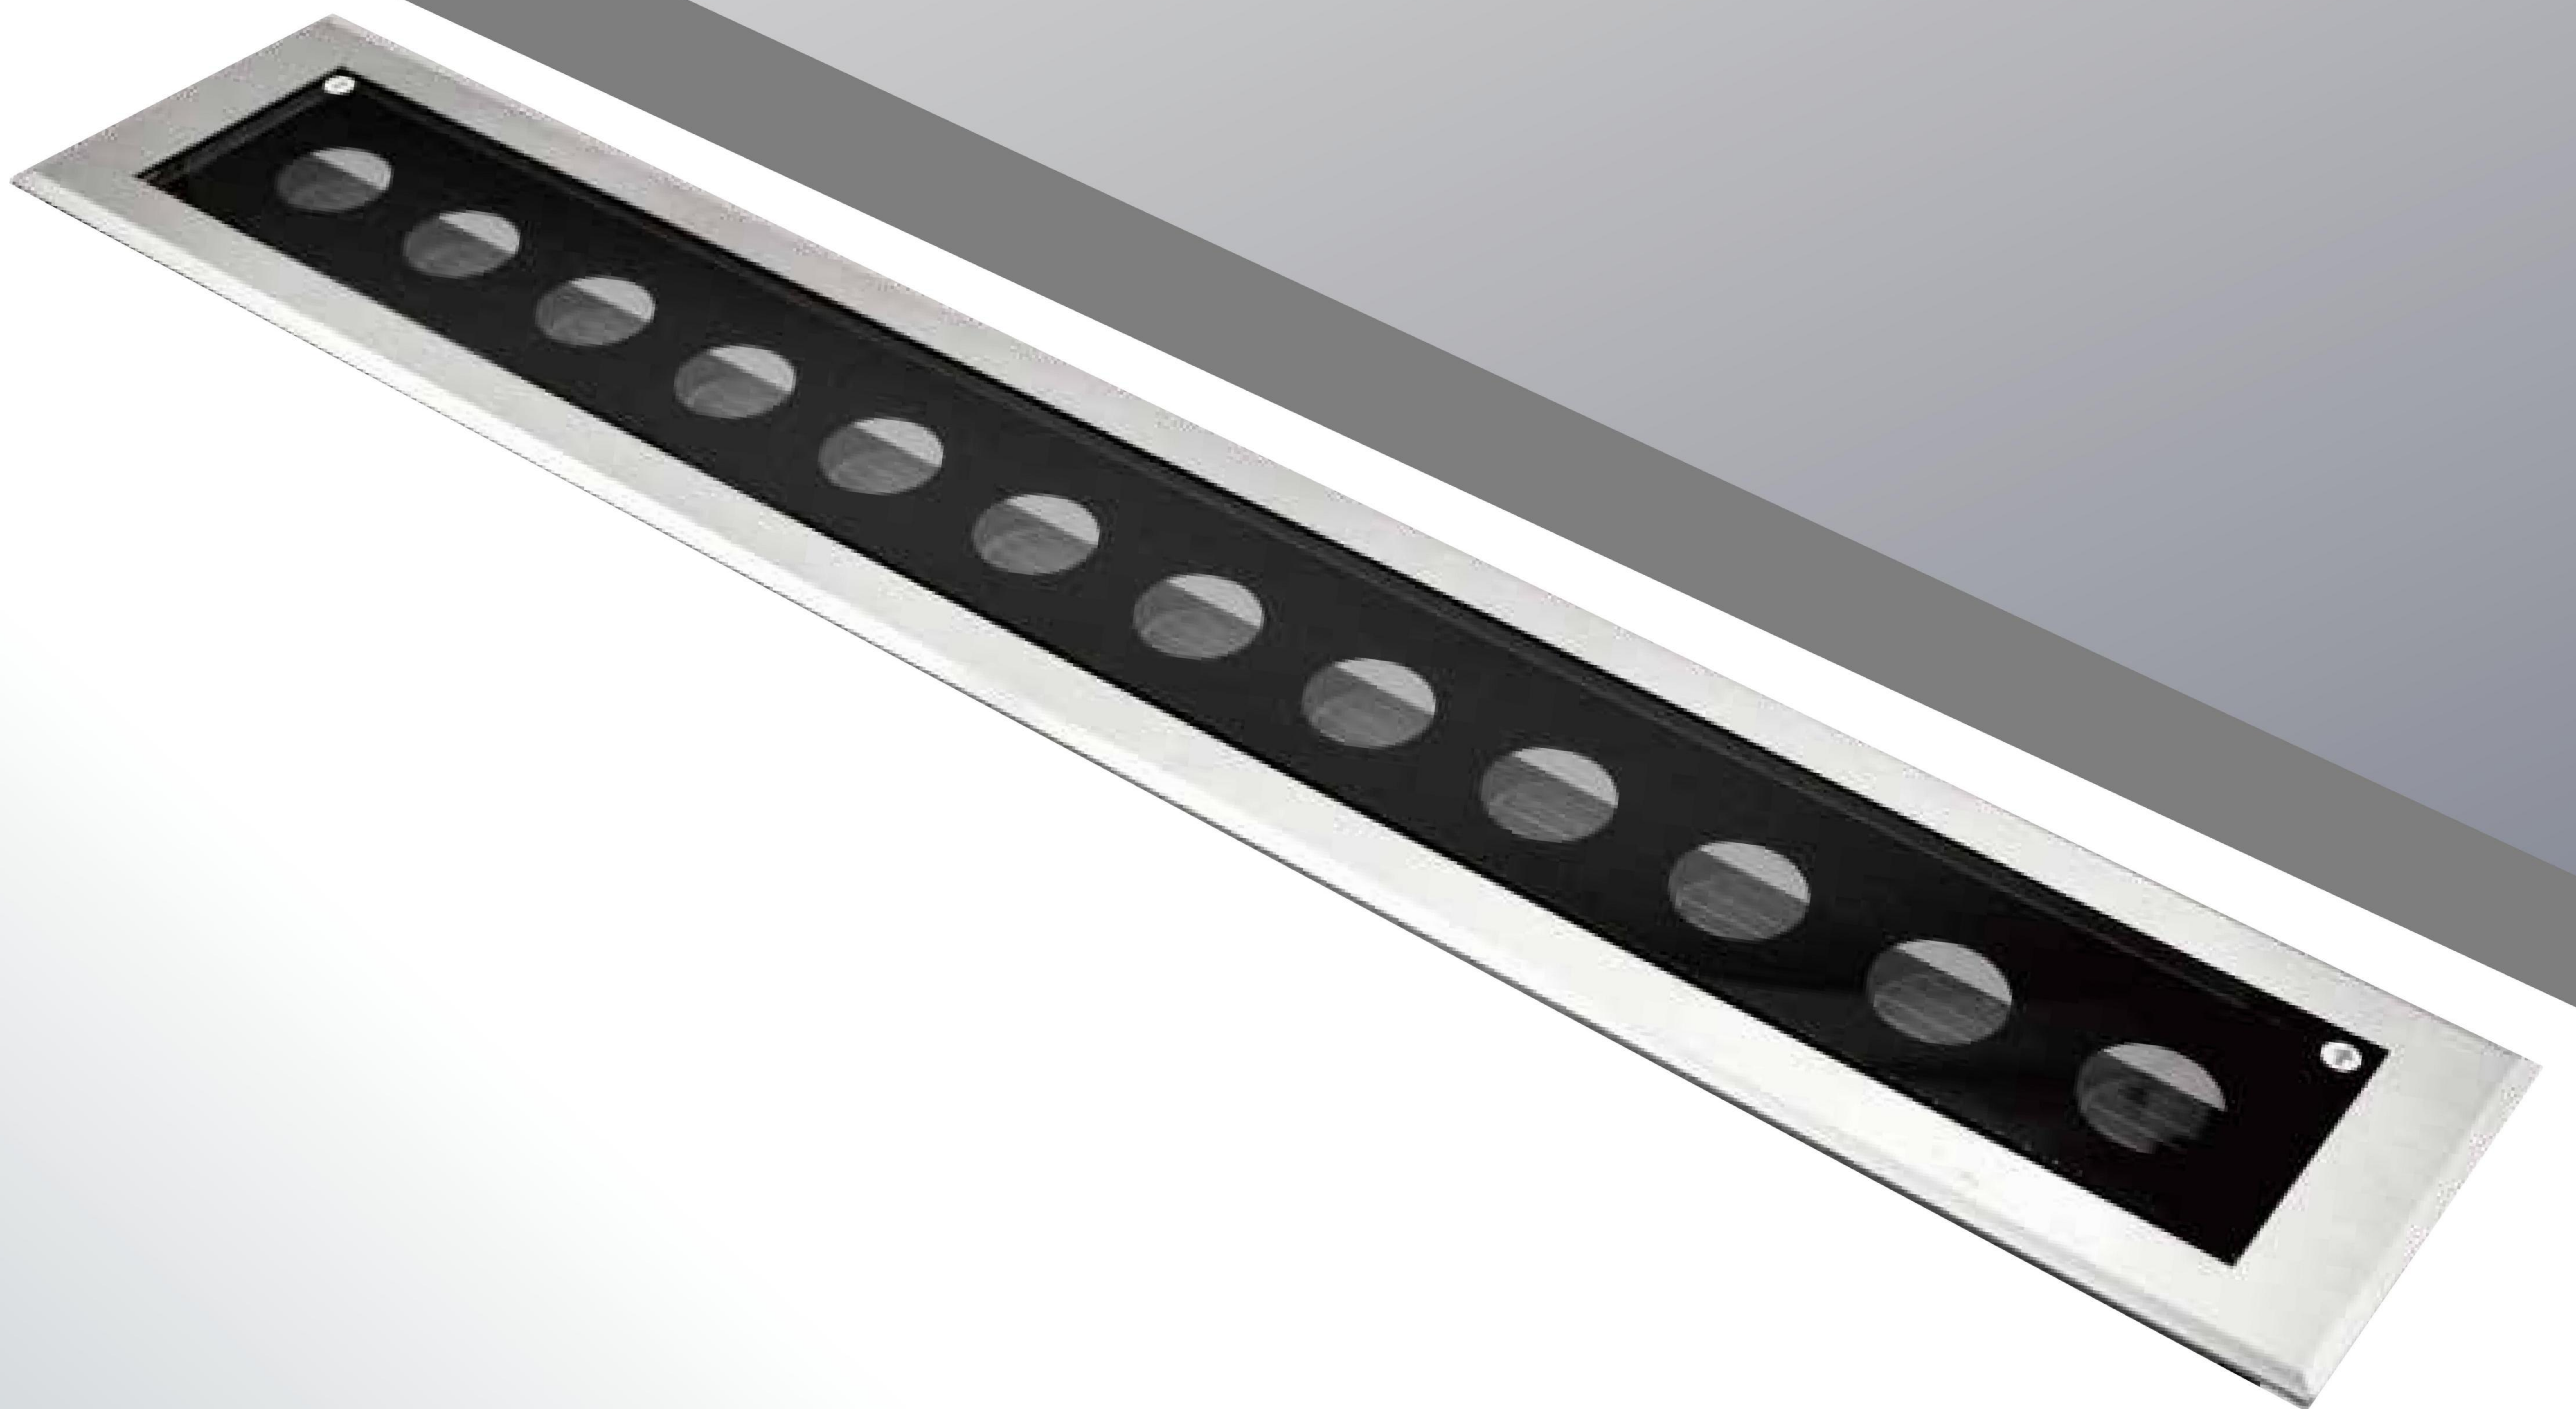


-
- Low Glare Edged Linear Underground Luminaire
 - Suitable for wall wash lighting close to the wall
 - Direction of light output, moderately tilted towards the illuminated surface
 - Built-in glare grille tilted towards the illuminated surface.
 - Can be used with monochrome or RGBW color changing light source
 - Seamless splicing, wires can be pushed into pre-built boxes.
 - Static load: 1000kg, 24V, IP67
 - ON/OFF, DMX512, 0~10V control mode can be realized.
 - Operating Temperature: -20°C~50°C

Linear Ground Light With Frame


Underground light




Code	Watt(w)	Optic	Flux(lm)
LBW75-36WA12	36W	12°	2117lm
LBW75-36WA1022	36W	10X22°	1993lm
LBW75-36WA1560	36W	17X57°	1568Lm

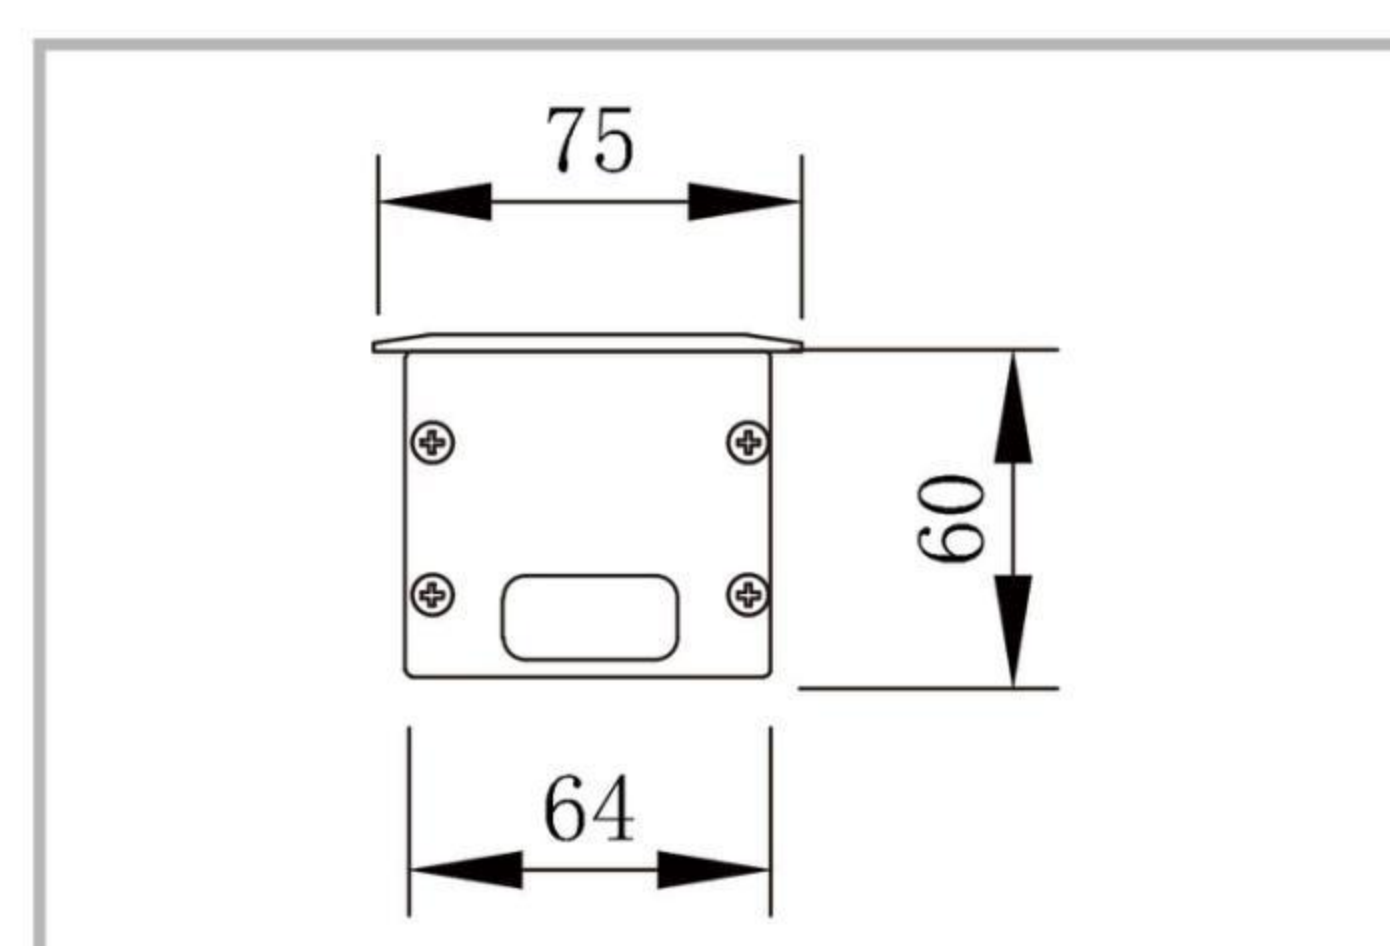


Protection: IP67/IK08
 Product weight: 3.1KG
 Physical Characteristics: Surface below 40 degrees, static pressure resistance 1000KG
 Optional color temperatures: Single white light RGBW
 Standard driver: Built-in constant current, external DC24V (sold separately)
 Optional driver: Built-in DMX512, 0-10V
 External DMX512, 0-10V, DALI, Thyristor

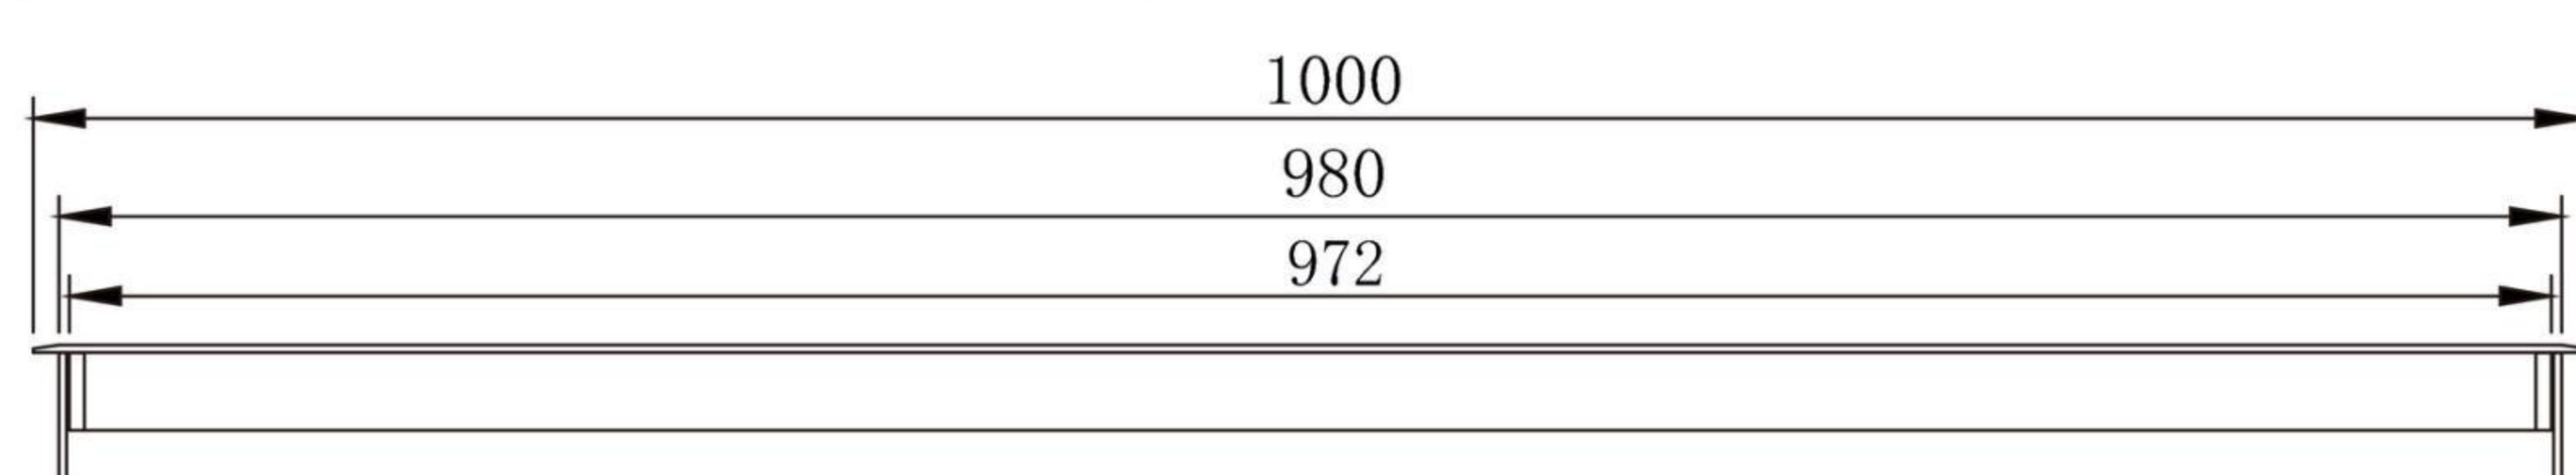

LBW75-36WA1022

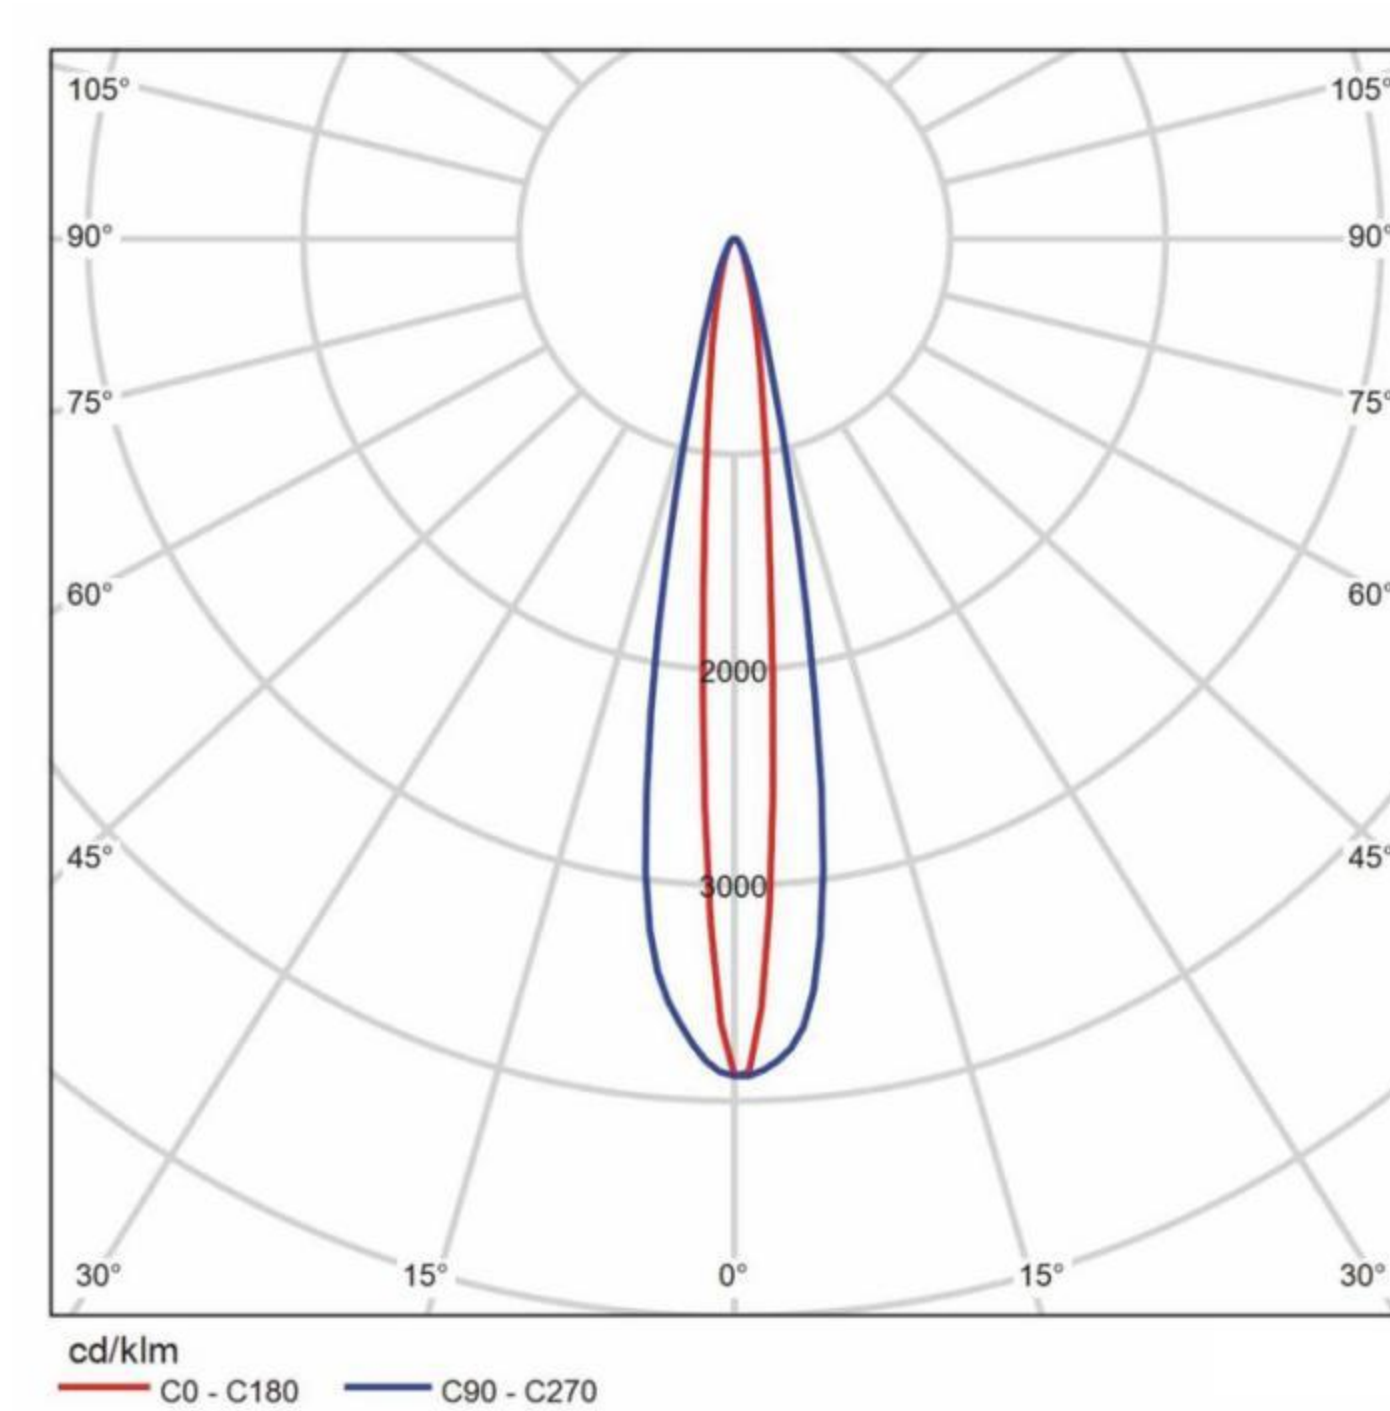


No grille

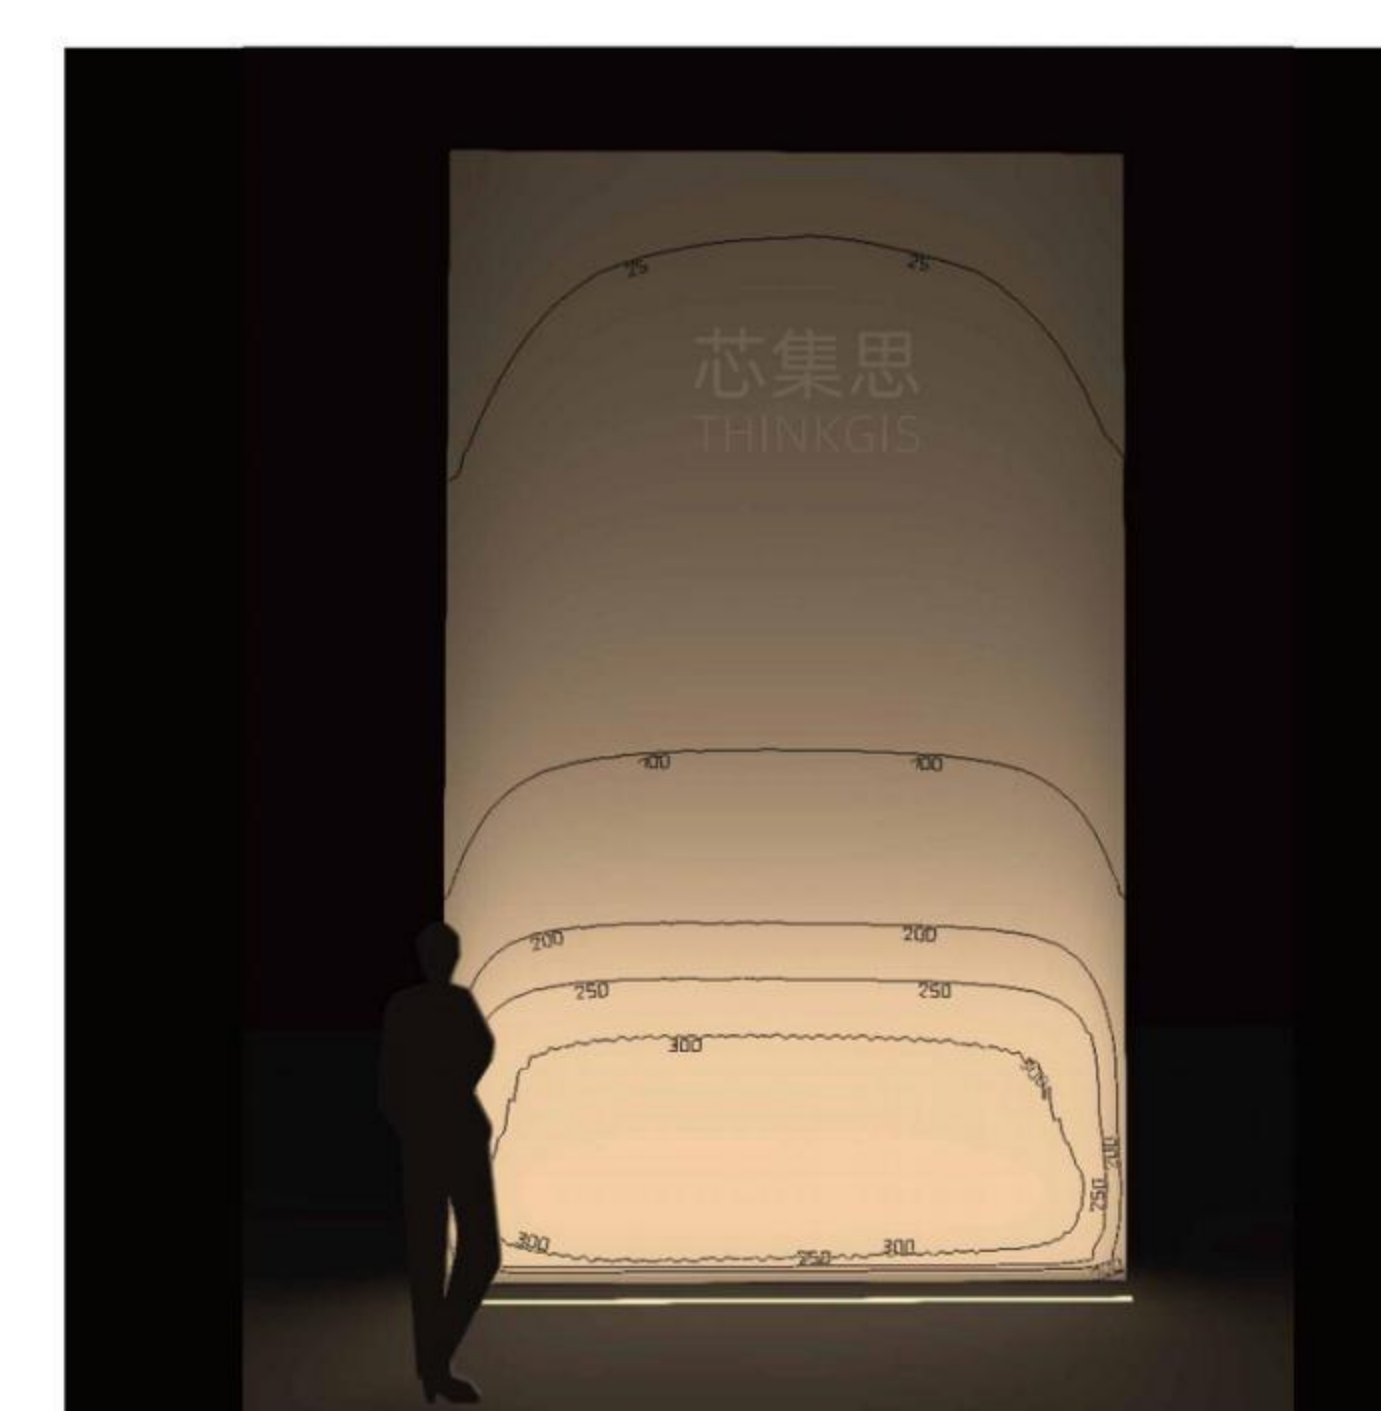


LBW75-36WA1022
 Wall height: 5m
 Lamp distance from wall: 0.2m
 Lamp spacing: Continuous installation

LBW75-36WA12

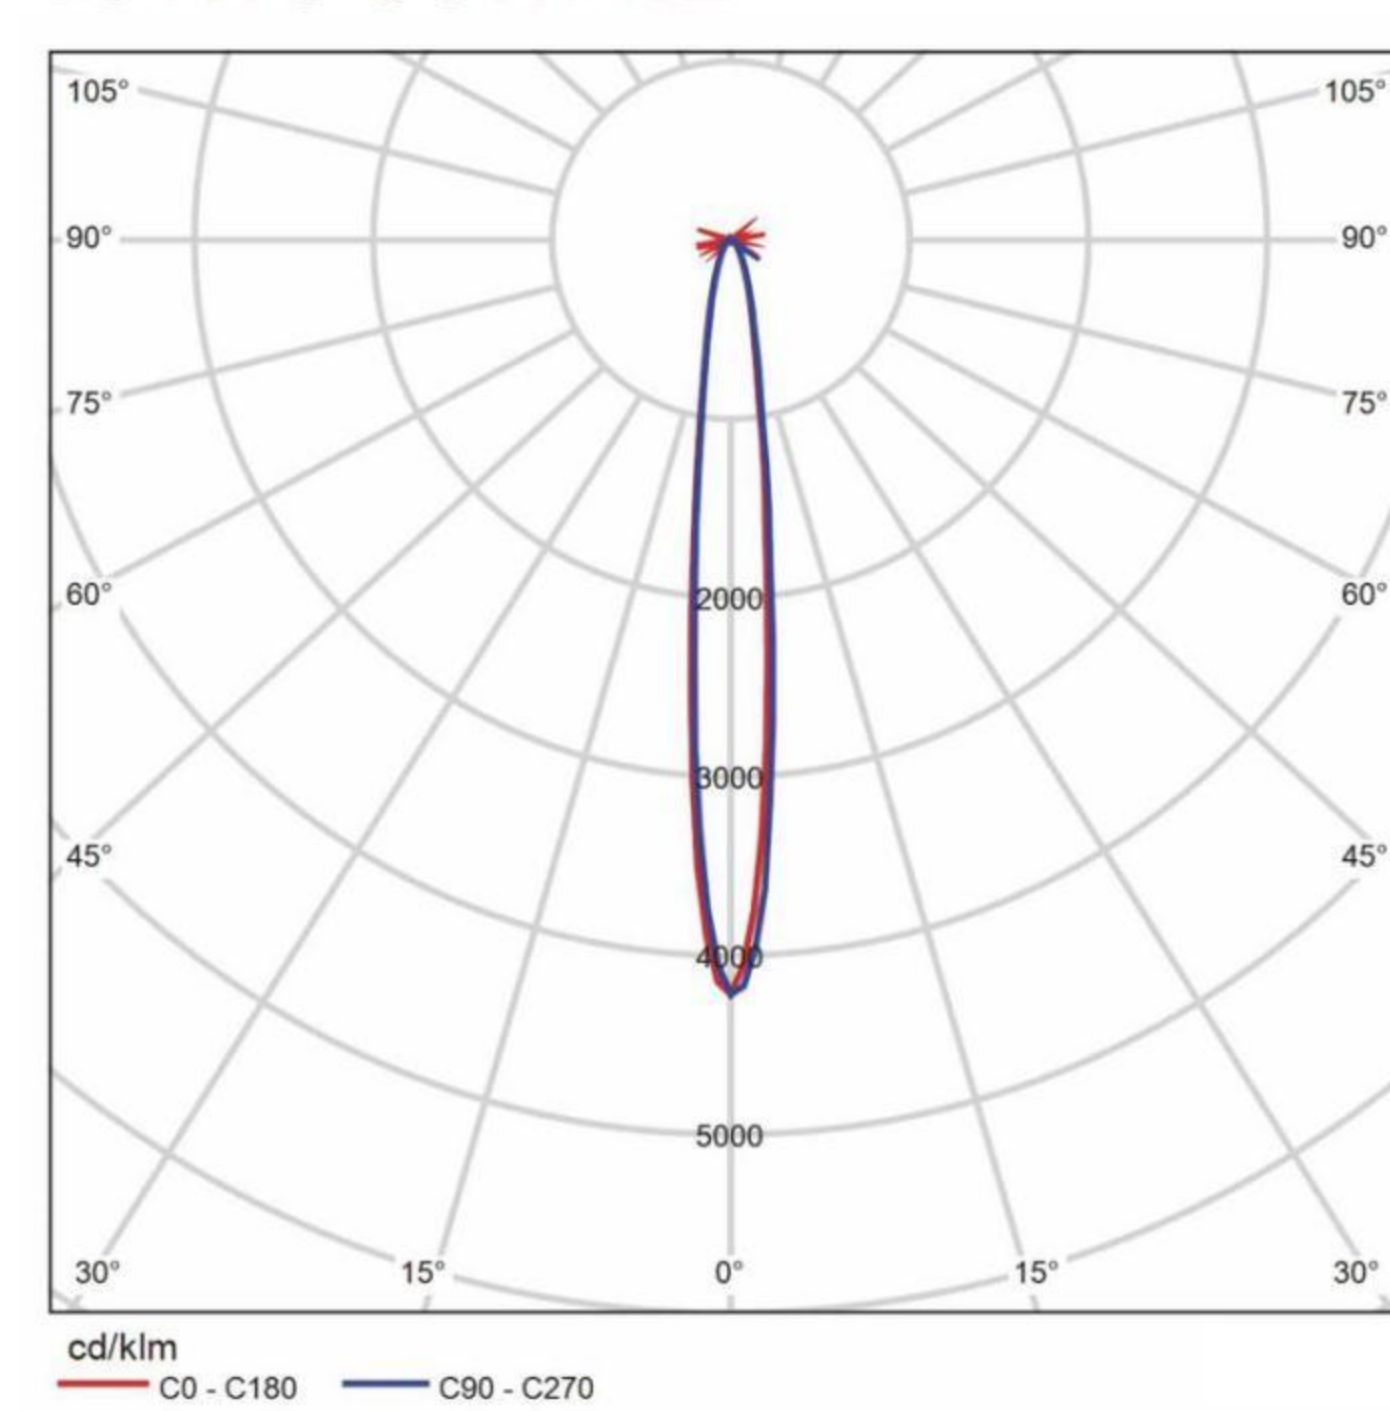



LBW75-36WA12
 Wall height: 5m
 Lamp distance from wall: 0.2m
 Lamp spacing: Continuous installation

5 degree offset grille

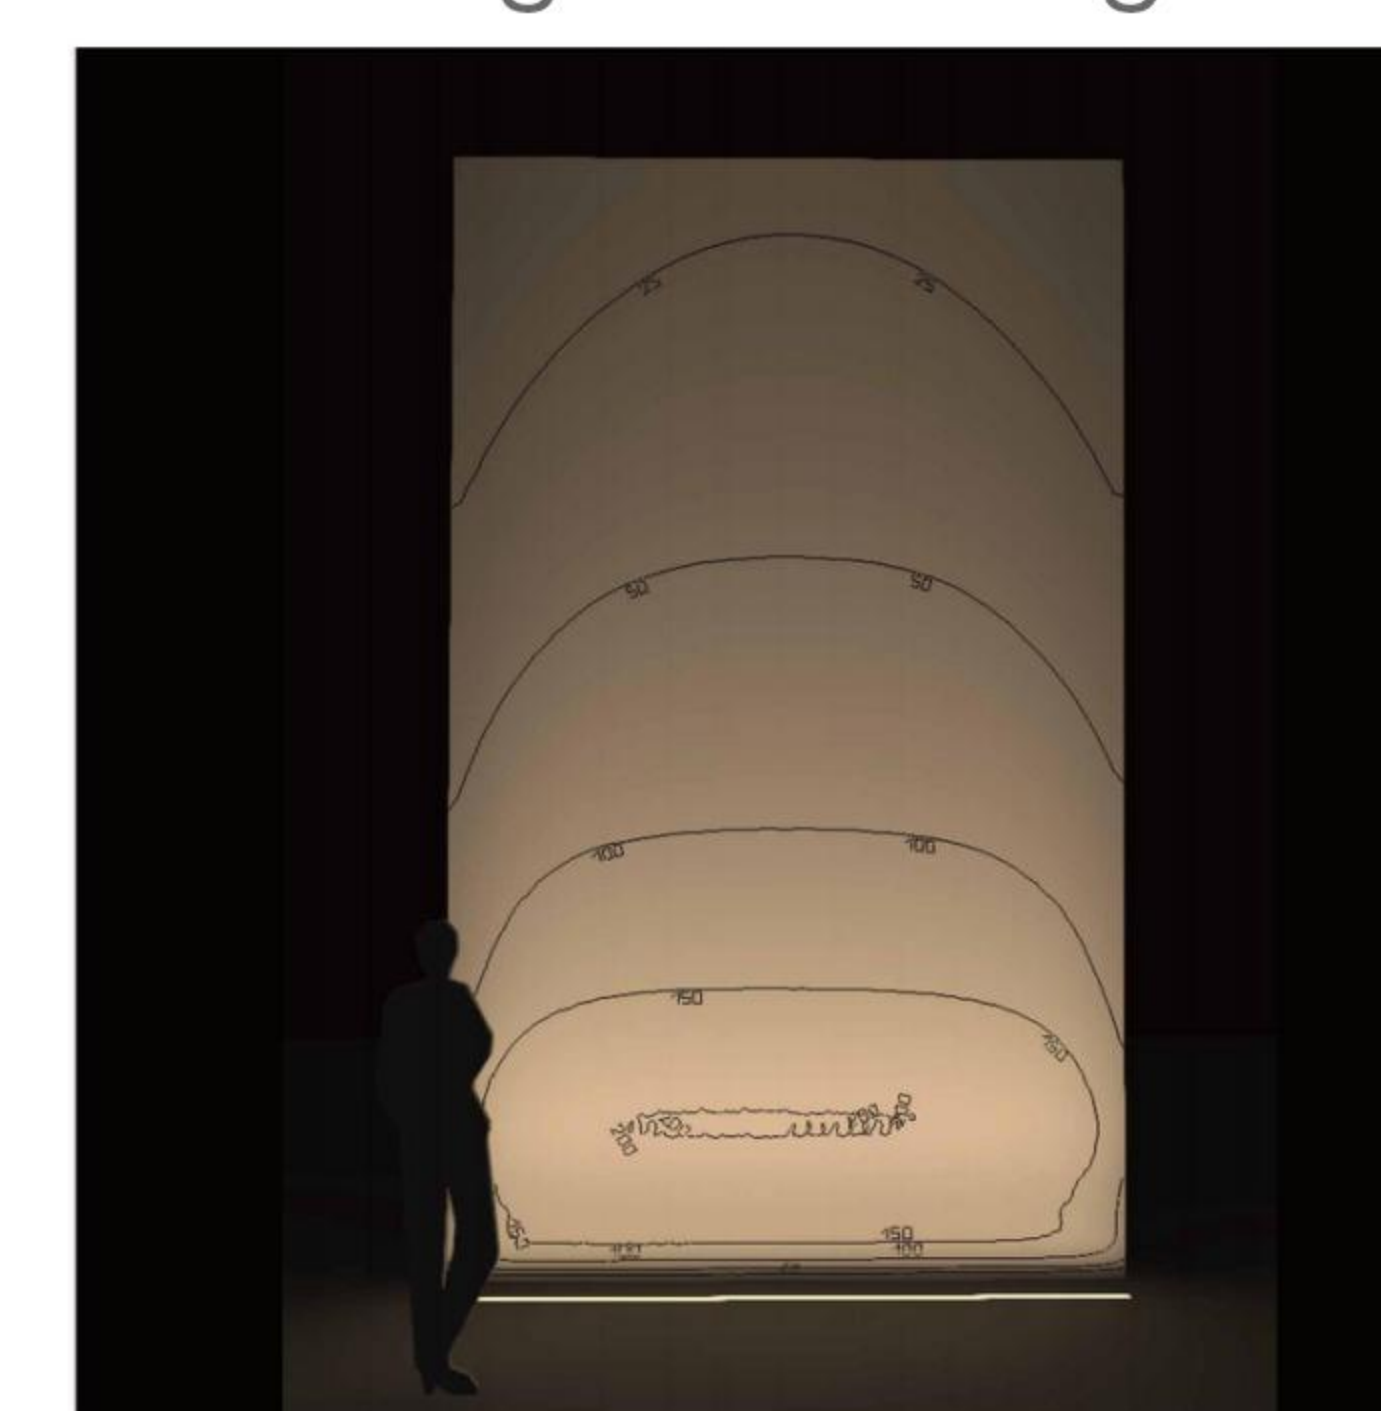


LBW75-36WA1022-P05
 Wall height: 5m
 Lamp distance from wall: 0.2m
 Lamp spacing: Continuous installation

LBW75-36WA1560

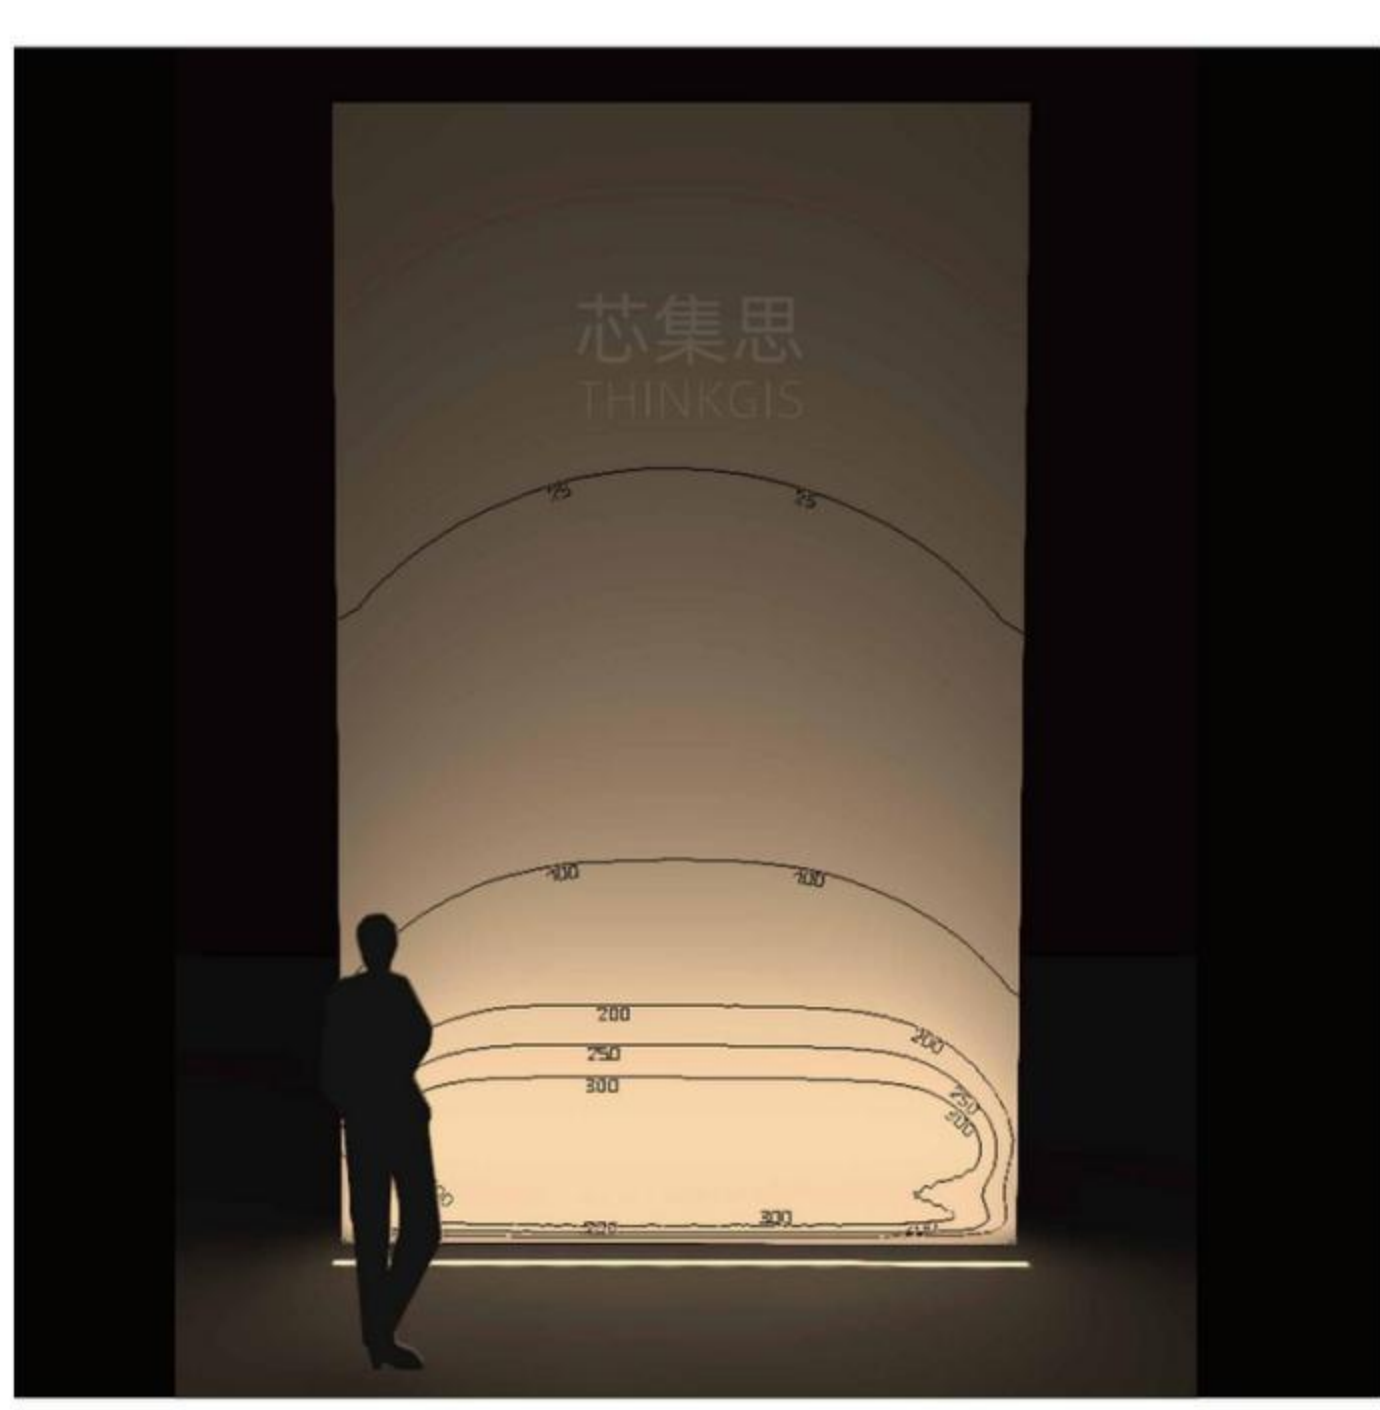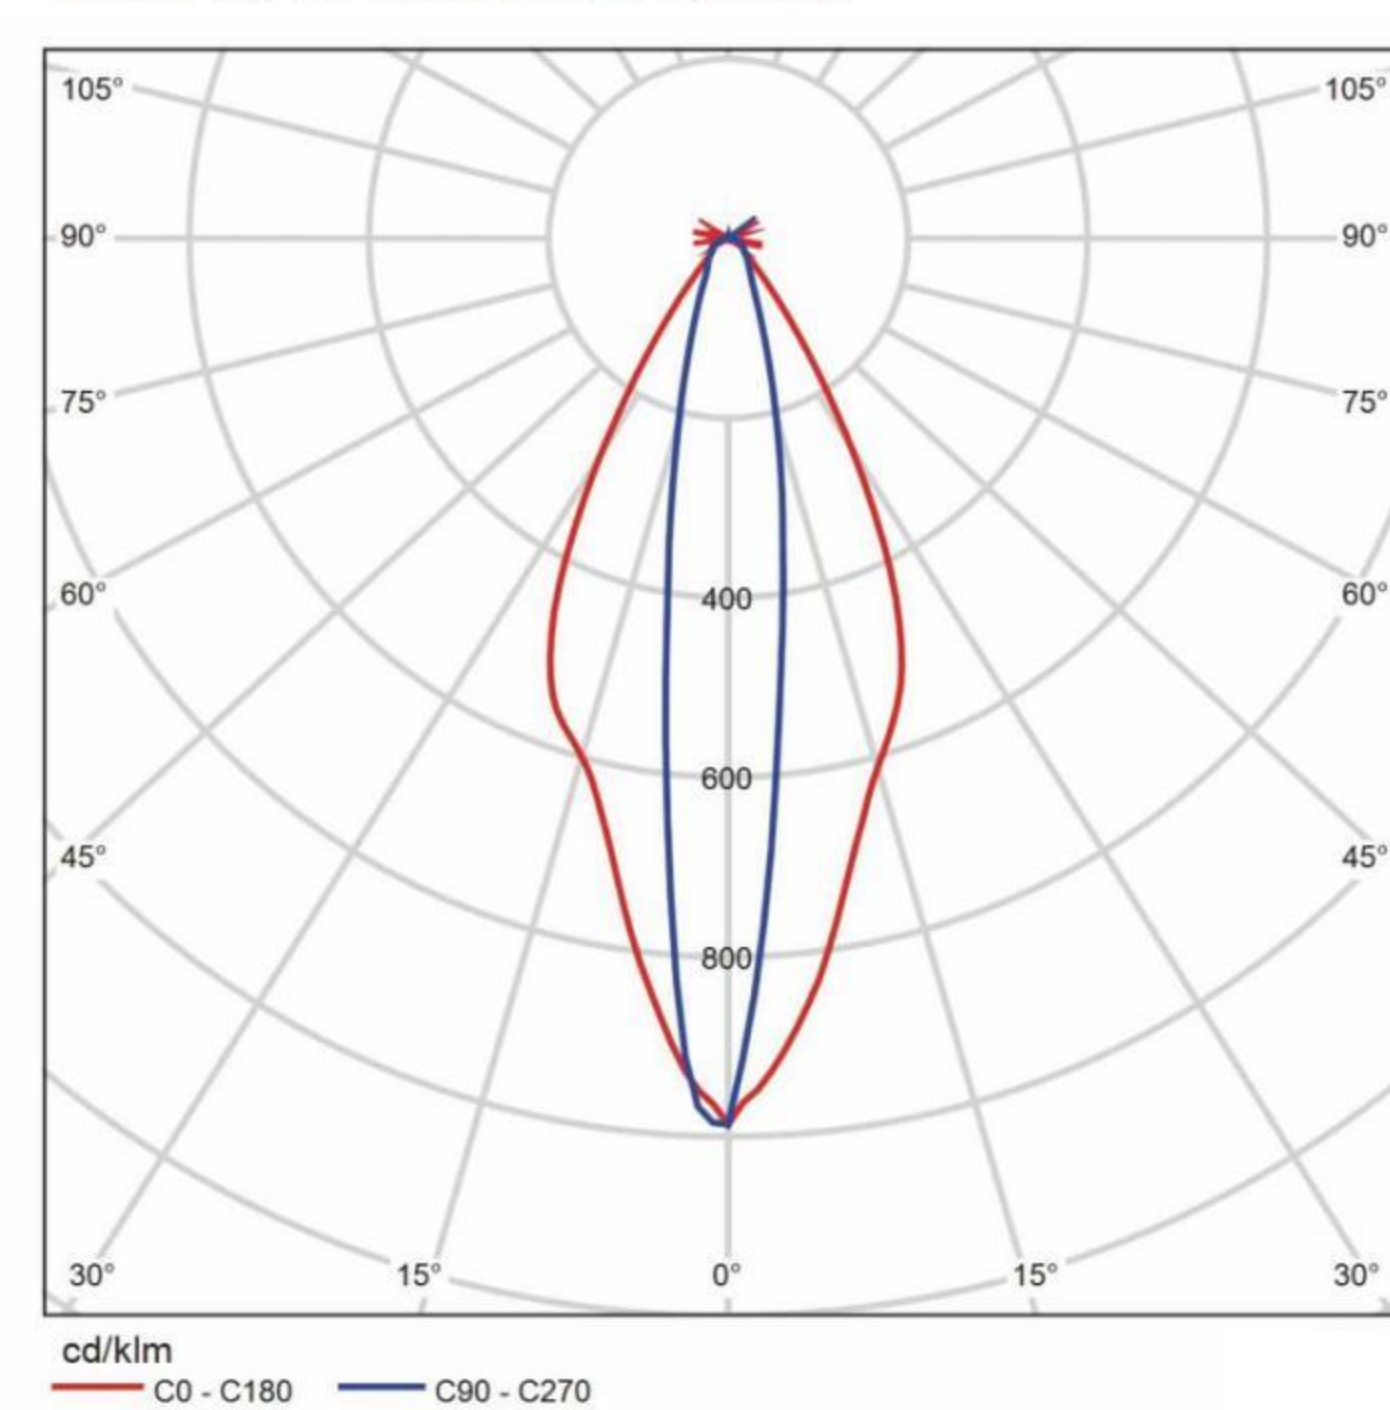

LBW75-36WA1560
 Wall height: 5m
 Lamp distance from wall: 0.2m
 Lamp spacing: Continuous installation


15 degree offset grille

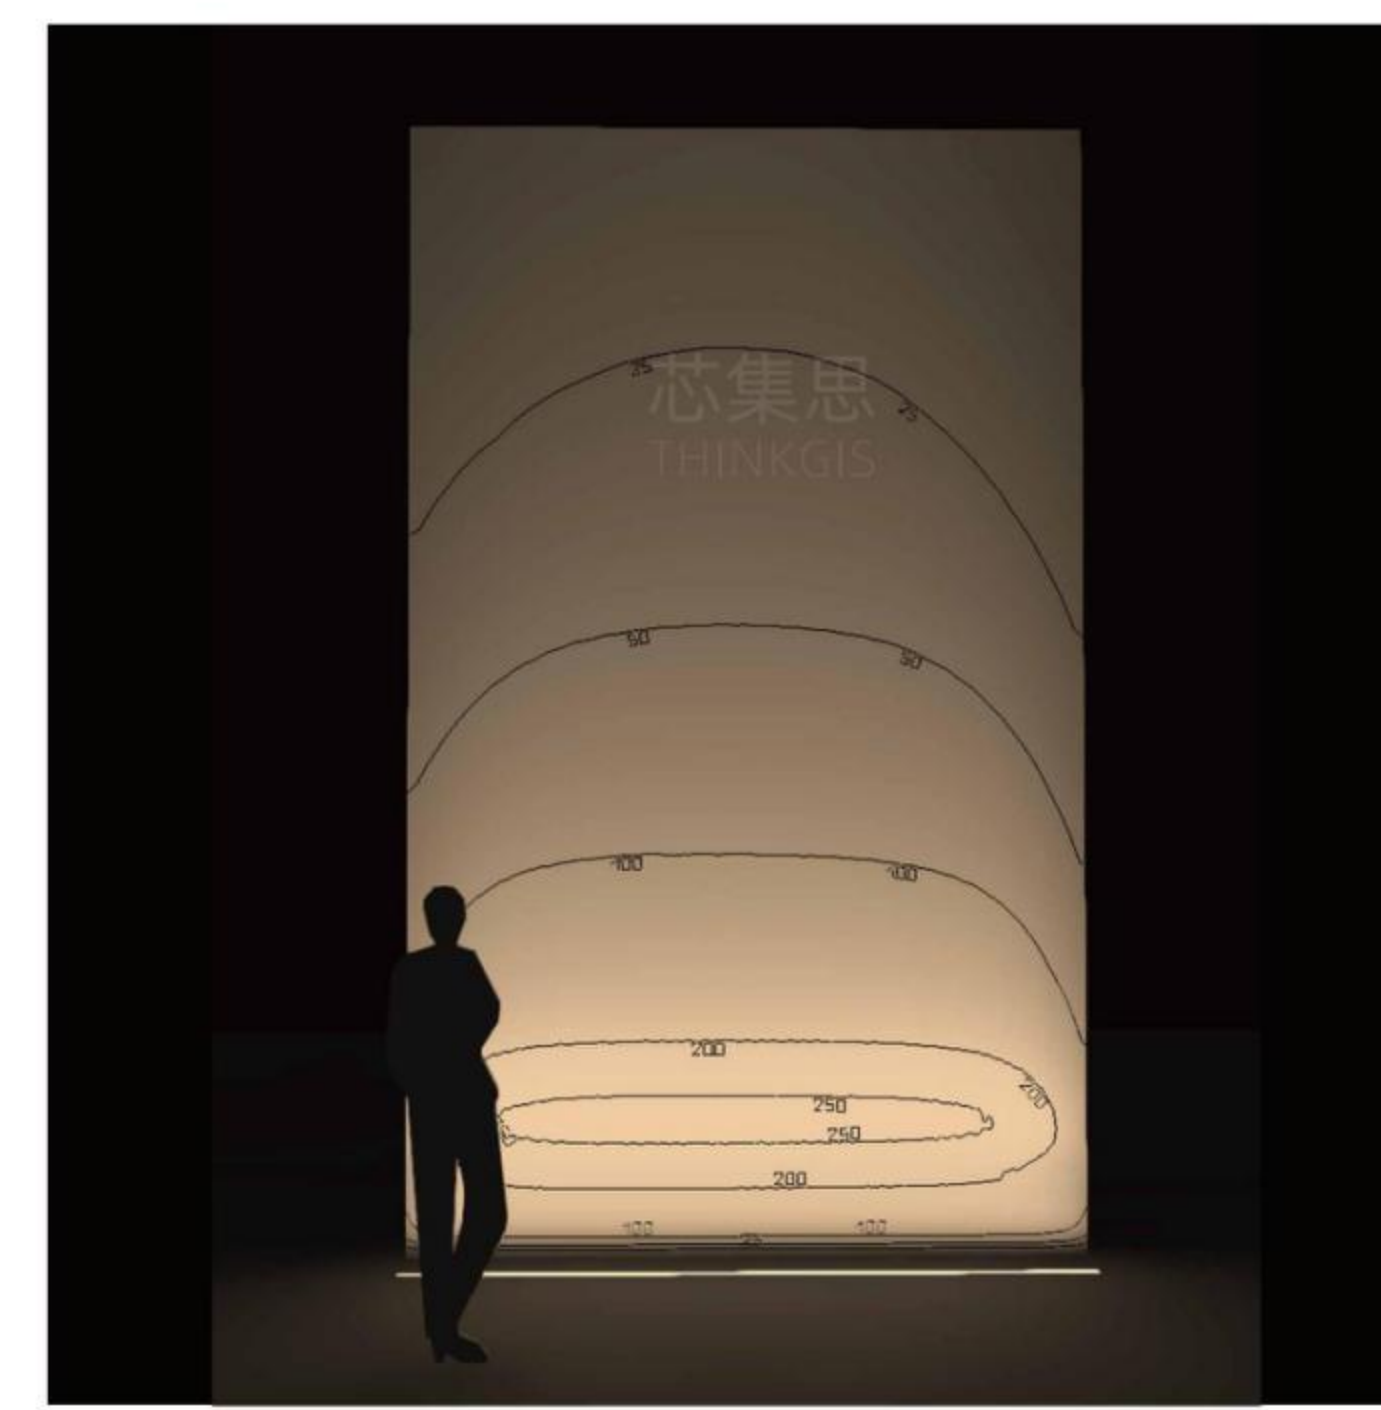

LBW75-36WA1022-P15
 Wall height: 5m
 Lamp distance from wall: 0.2m
 Lamp spacing: Continuous installation



Height of illuminated surface: 5m
 Distance between lamp and wall: 0.2m

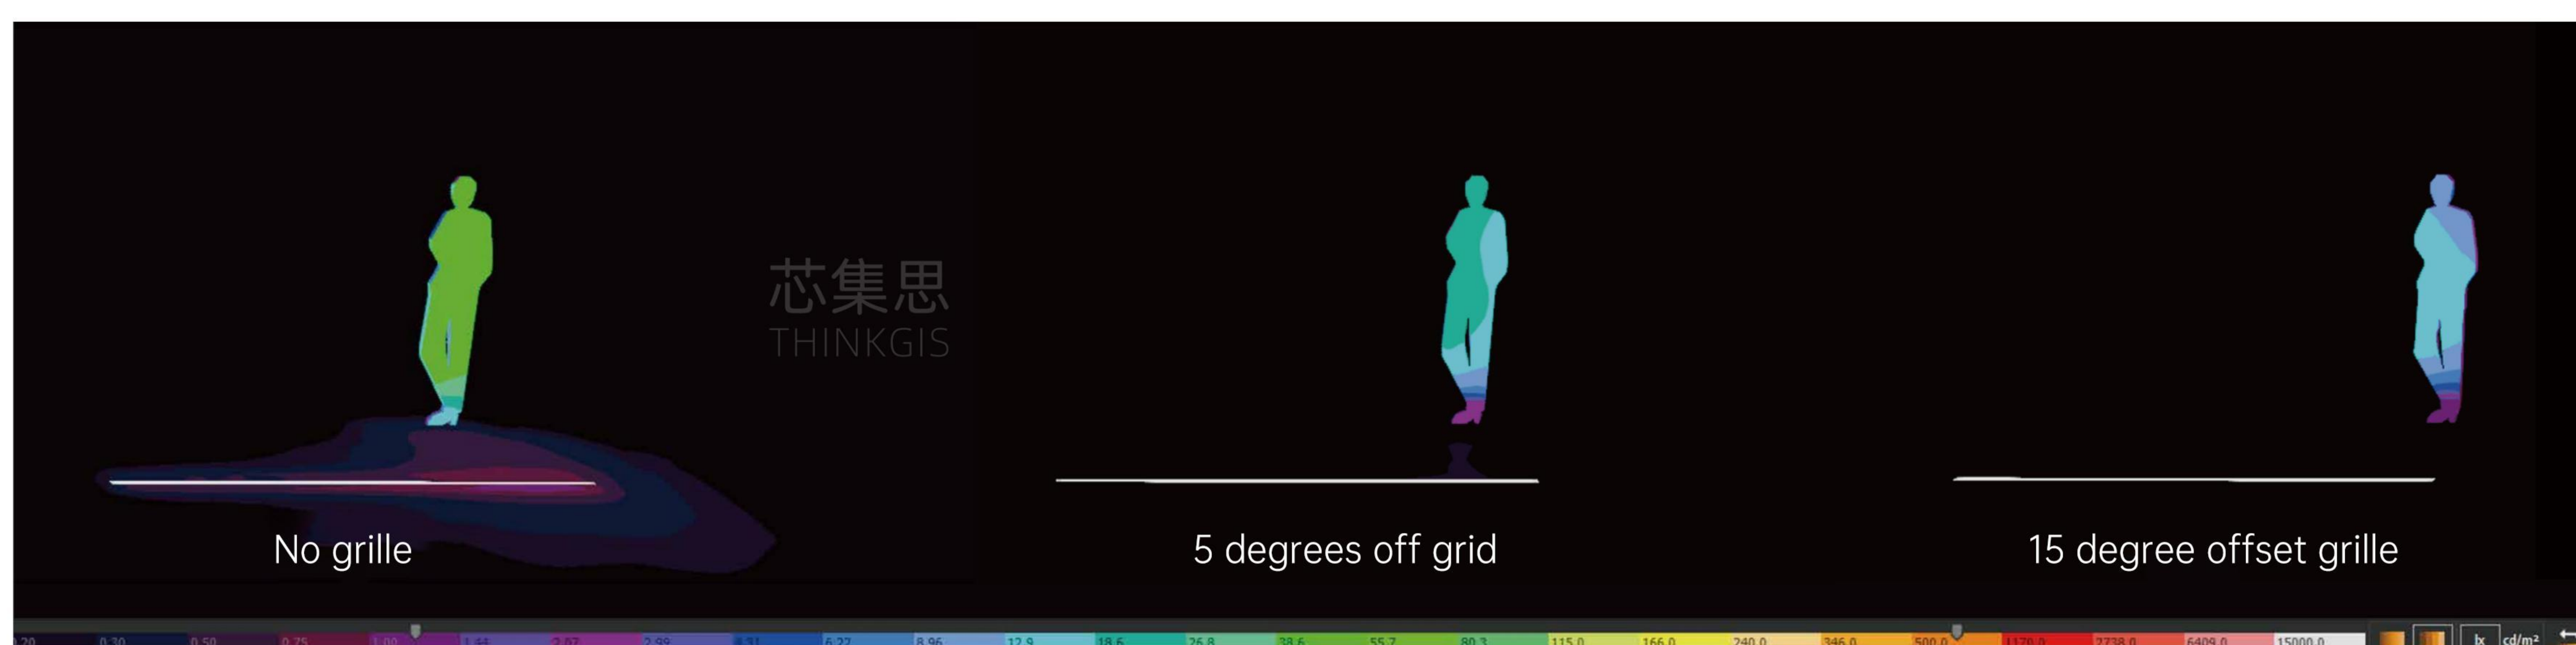

Observer's perspective

Linear light

Floodlight

Downlight

Step light

Armrest light


Wall lamp

Lawn lamp


Garden light

Linear Ground Light With Frame


Underground light

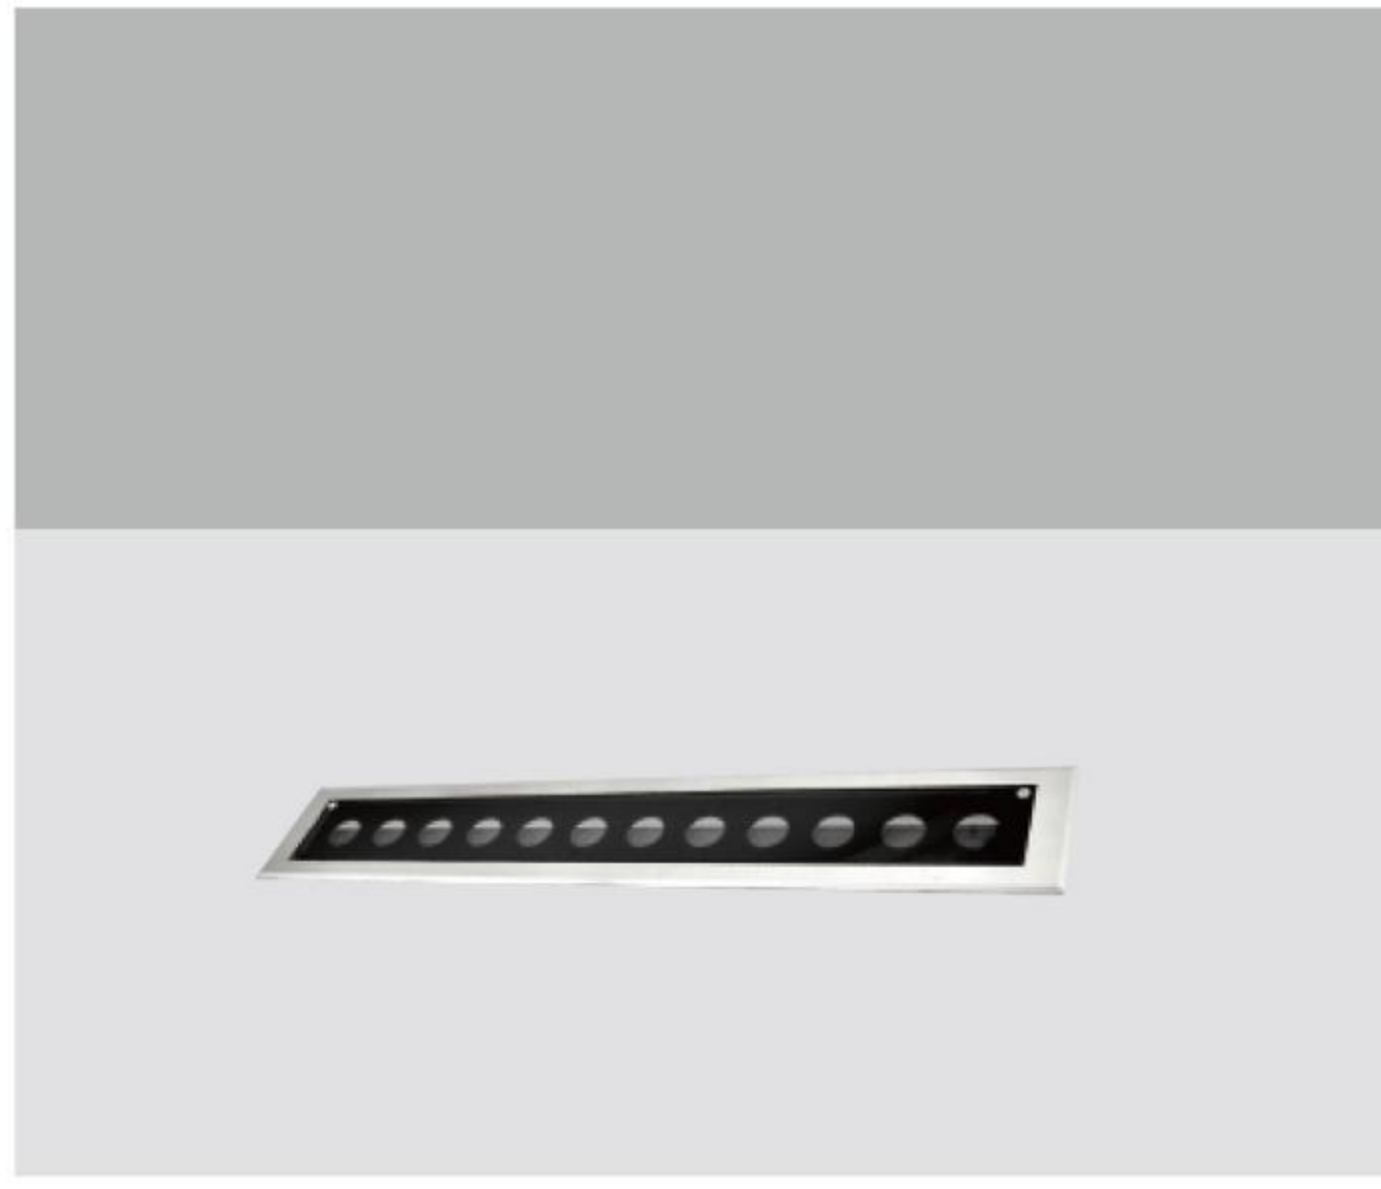



Code	Watt(w)	Optic	Flux(lm)
LBW96-72WA5	72W	5°	4392Lm
LBW96-72WA12	72W	12°	4680Lm
LBW96-72WA18	72W	18°	4680Lm
LBW96-72WA0520	72W	5°x20°	4320Lm

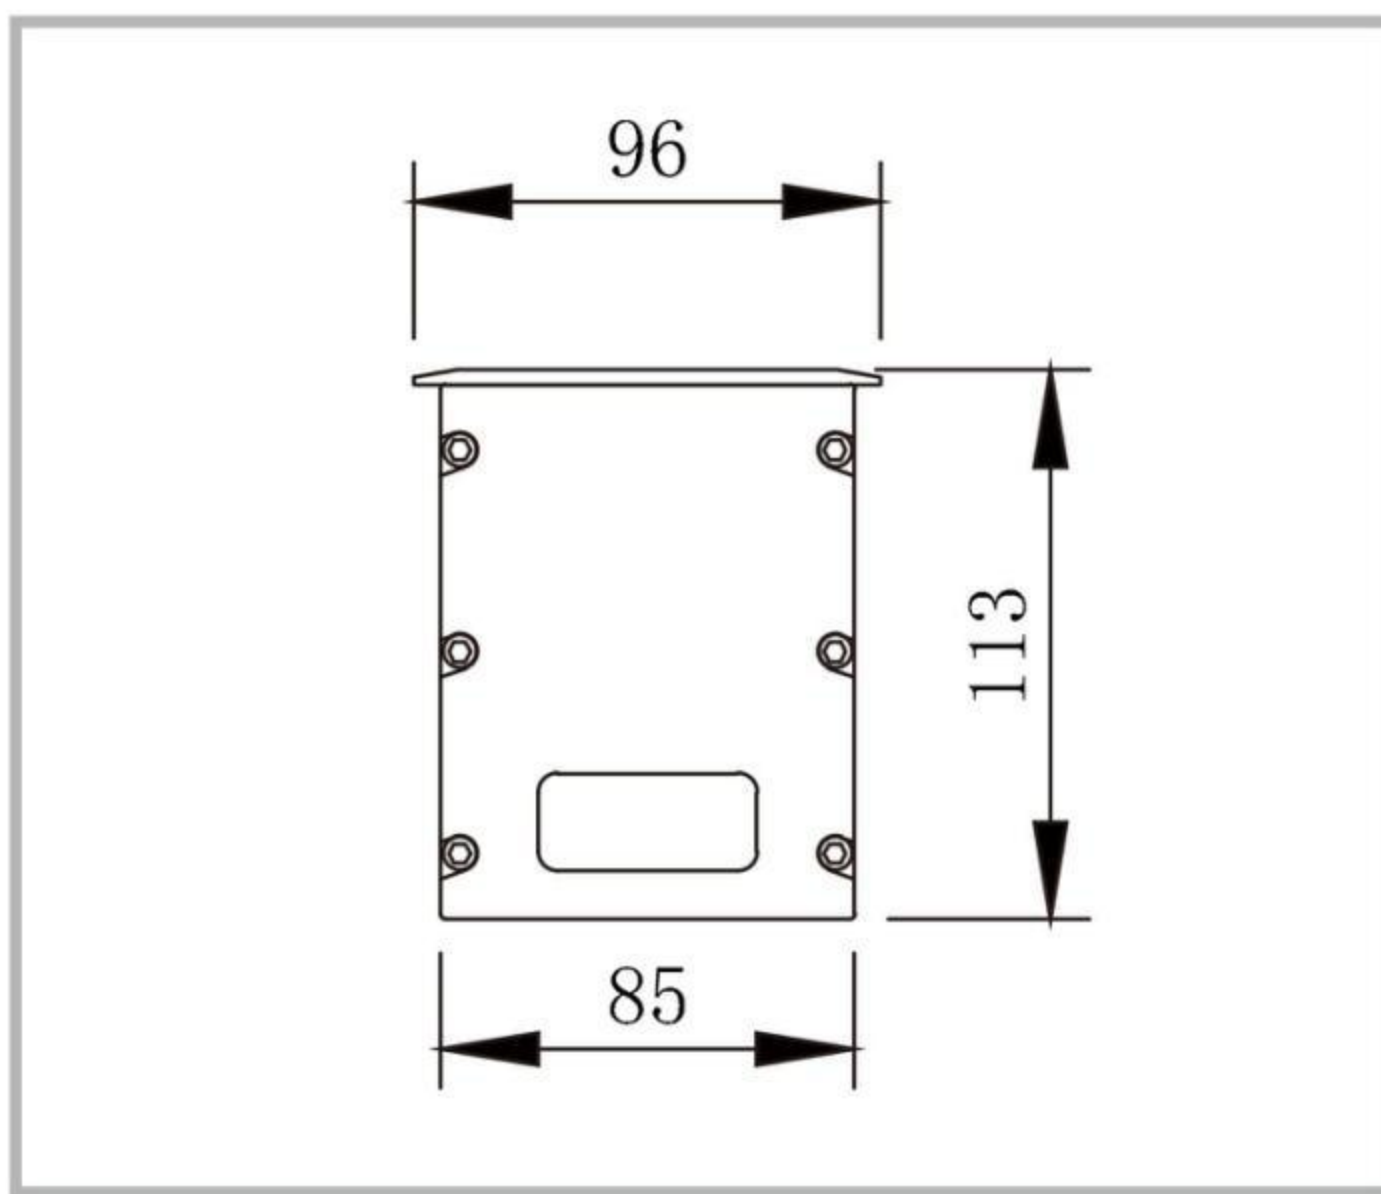

Protection: IP67/IK08
 Product weight: 3.7KG
 Physical Characteristics: Surface below 40 degrees, static compression 1000KG
 Optional color temperatures: ■ Single white light ■ RGBW
 Standard driver: built-in constant current, external DC24V (need to purchase separately)
 Optional driver: Built-in DMX5120-10V
 External DMX512, 0-10V, DALI, Thyristor


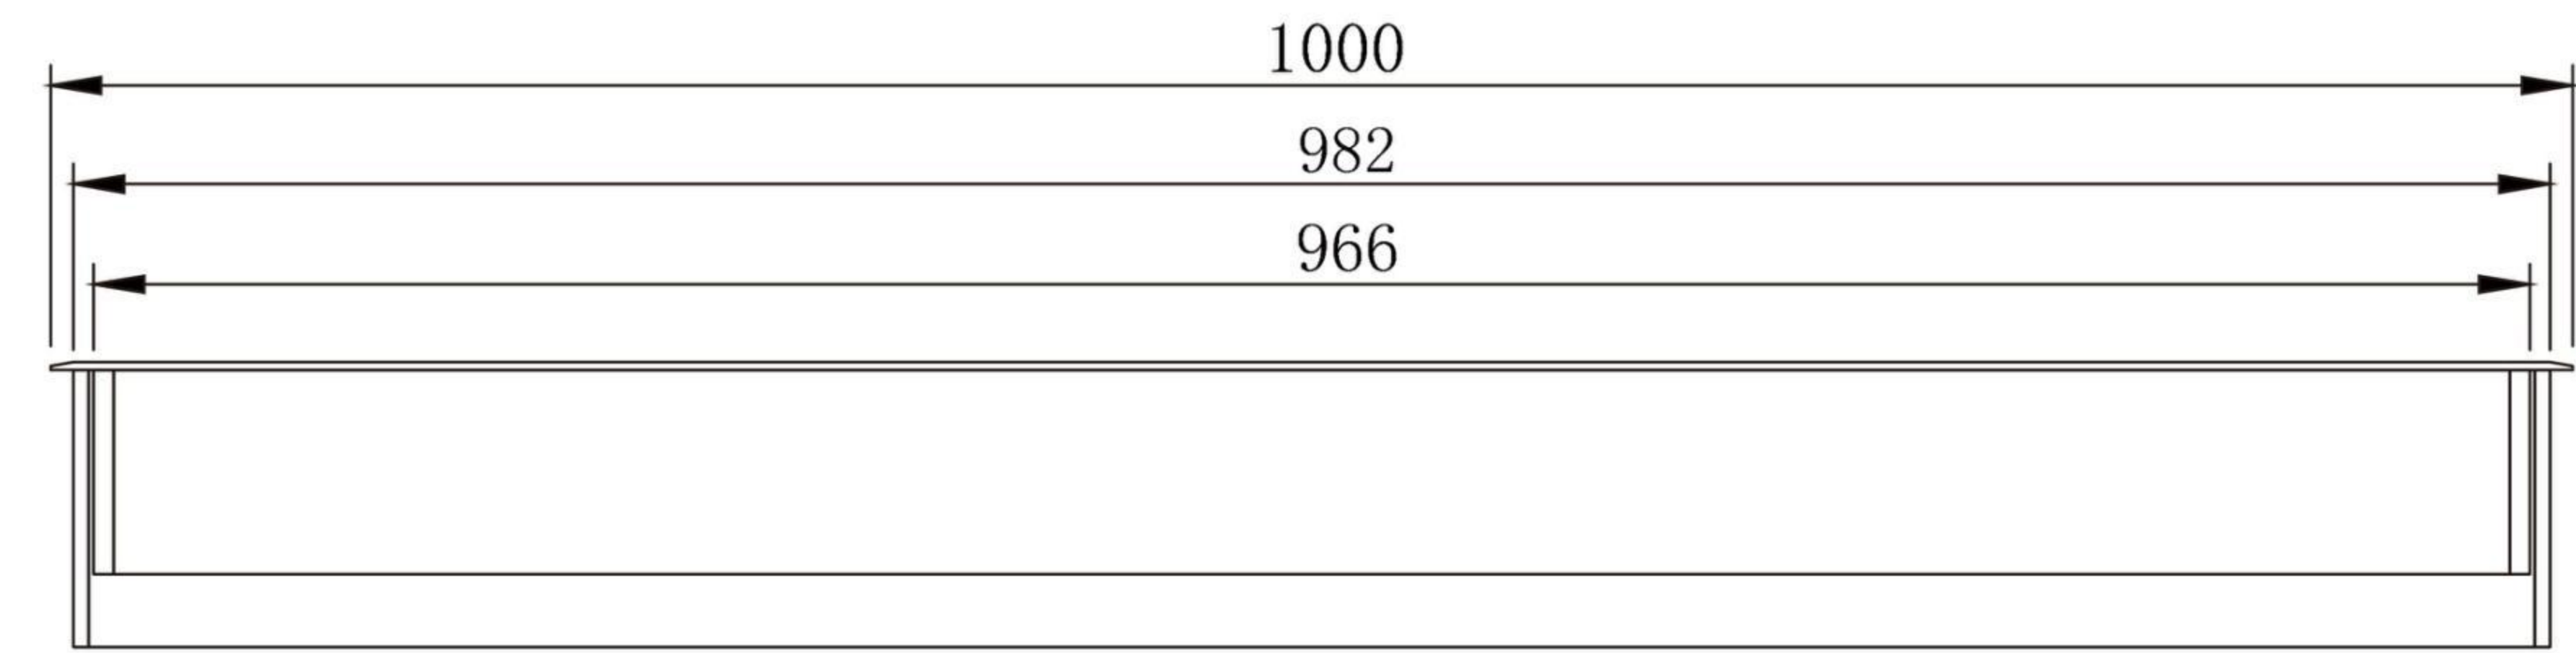


LBW96-72WA5

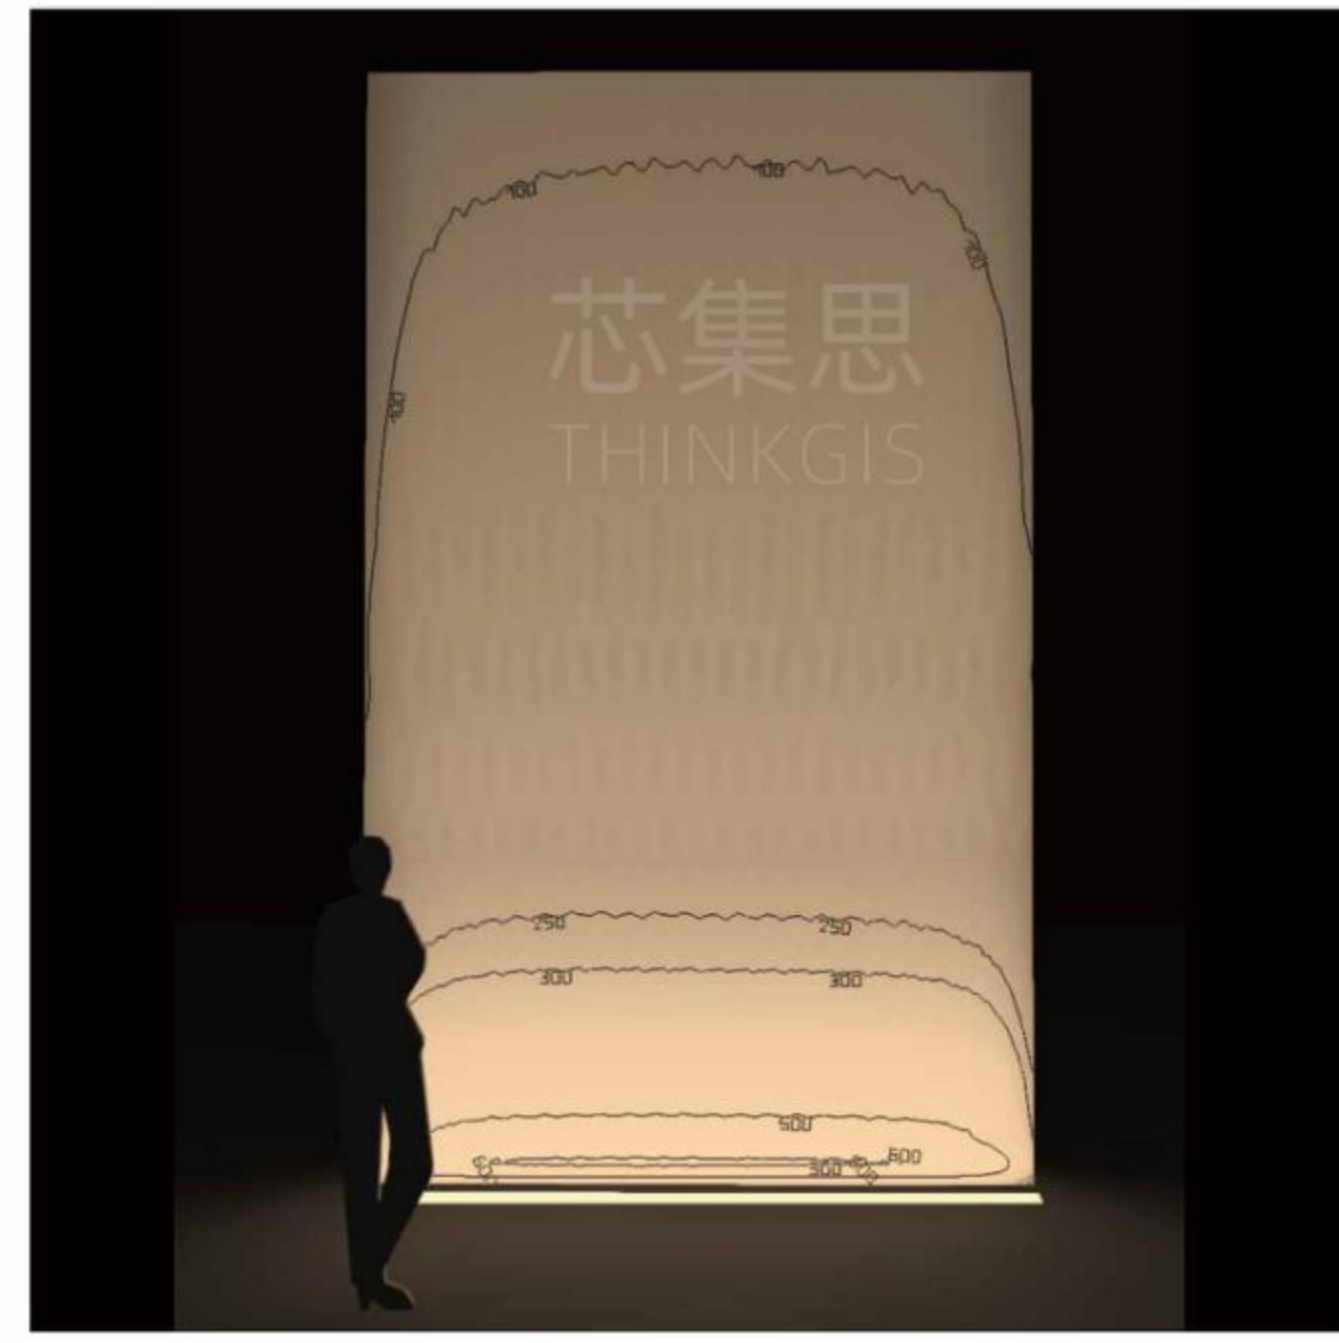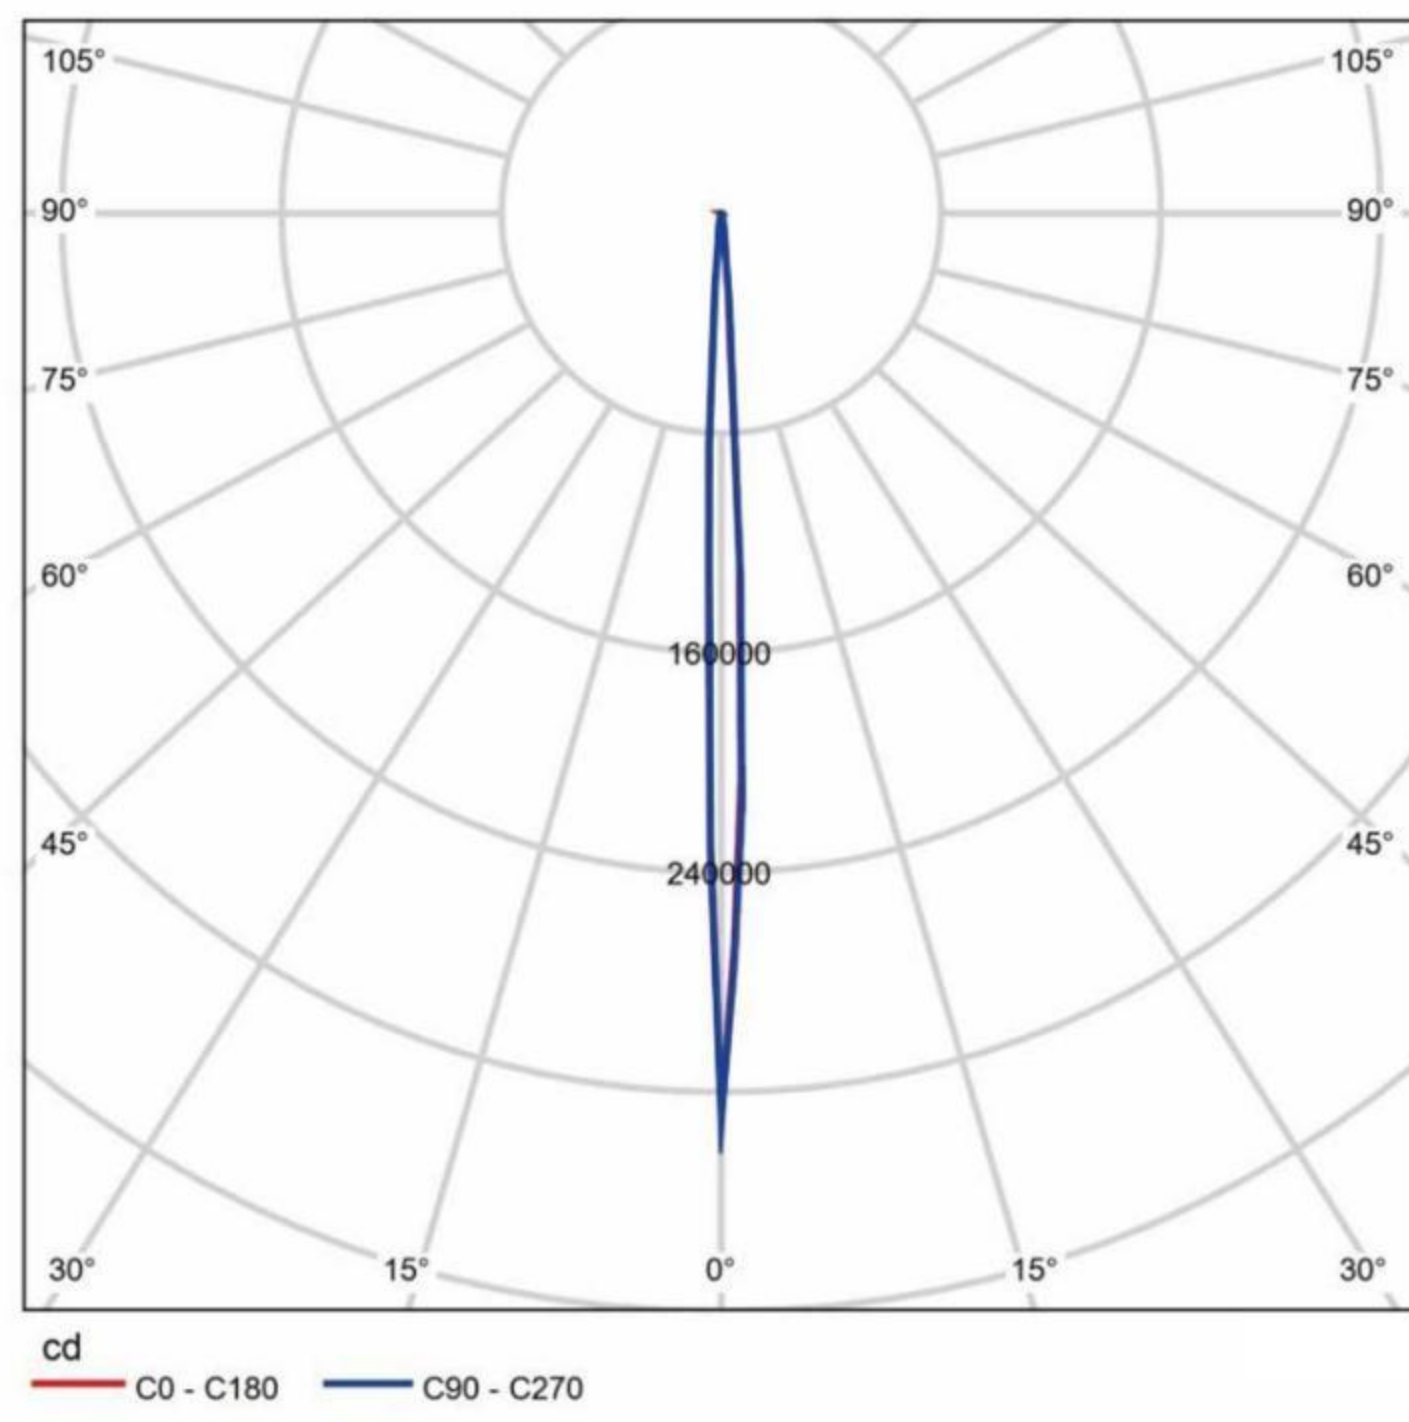



LBW96-72WA5
 Wall height: 5m
 Lamp distance from wall: 0.2m
 Lamp spacing: Continuous installation

LBW96-72WA12

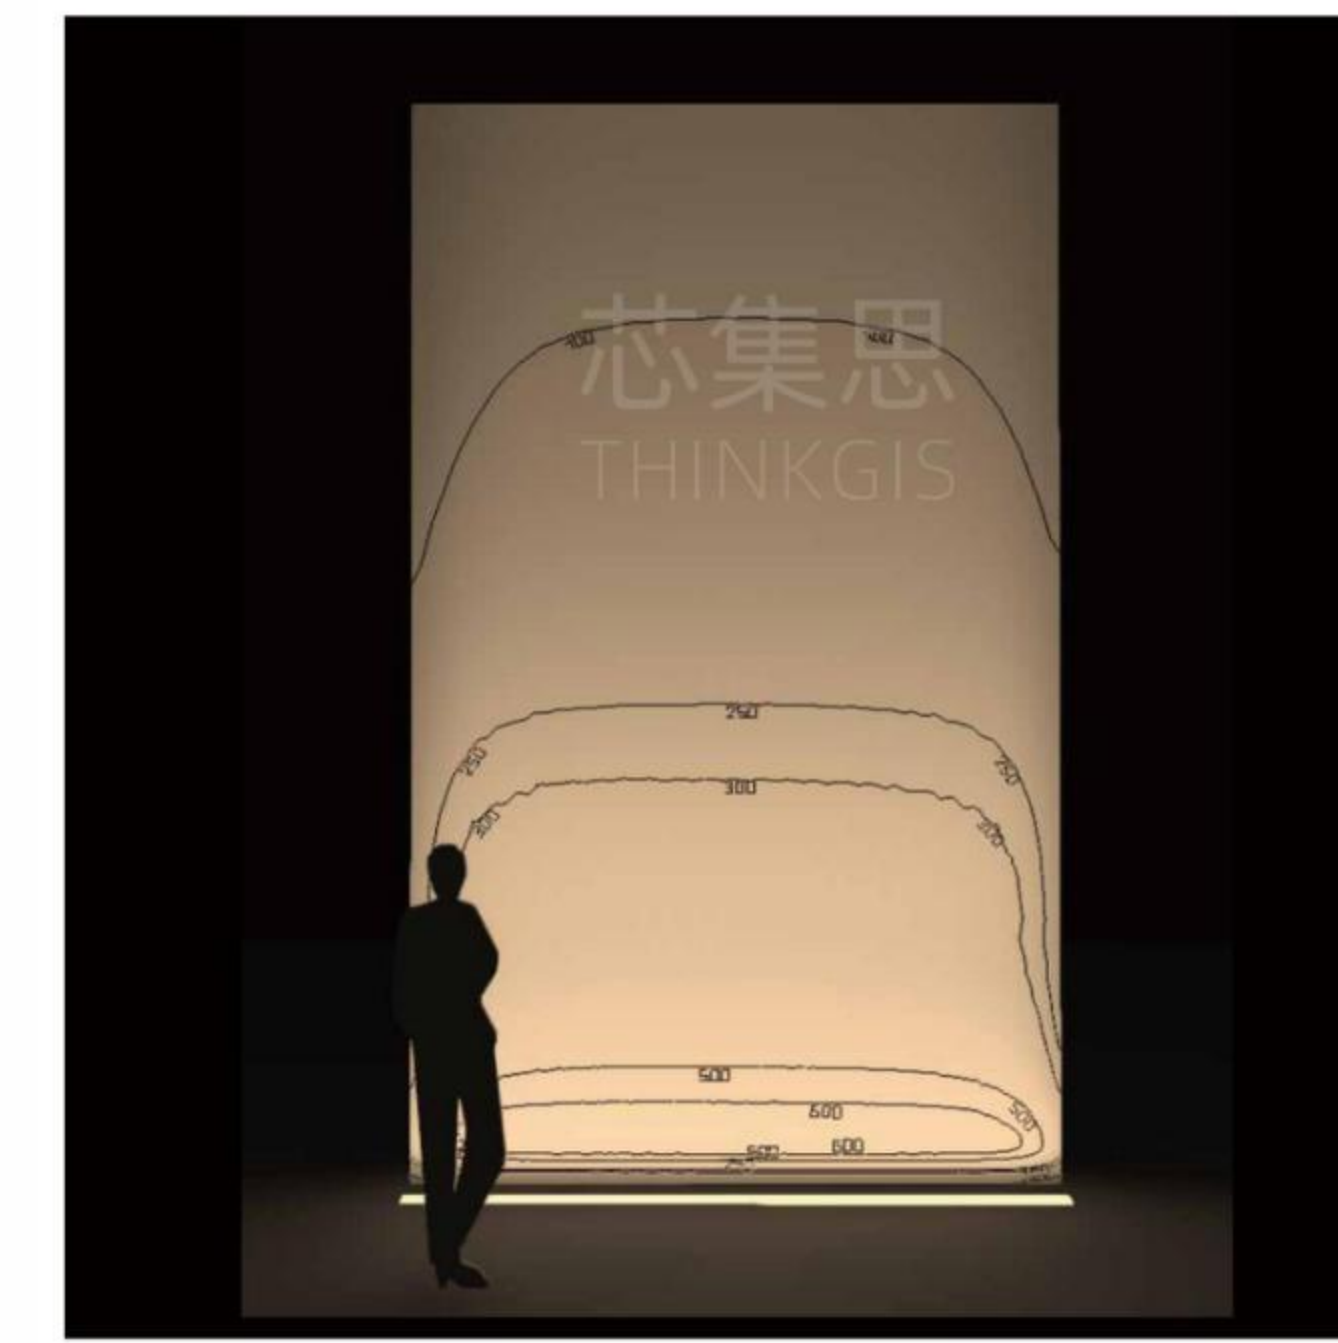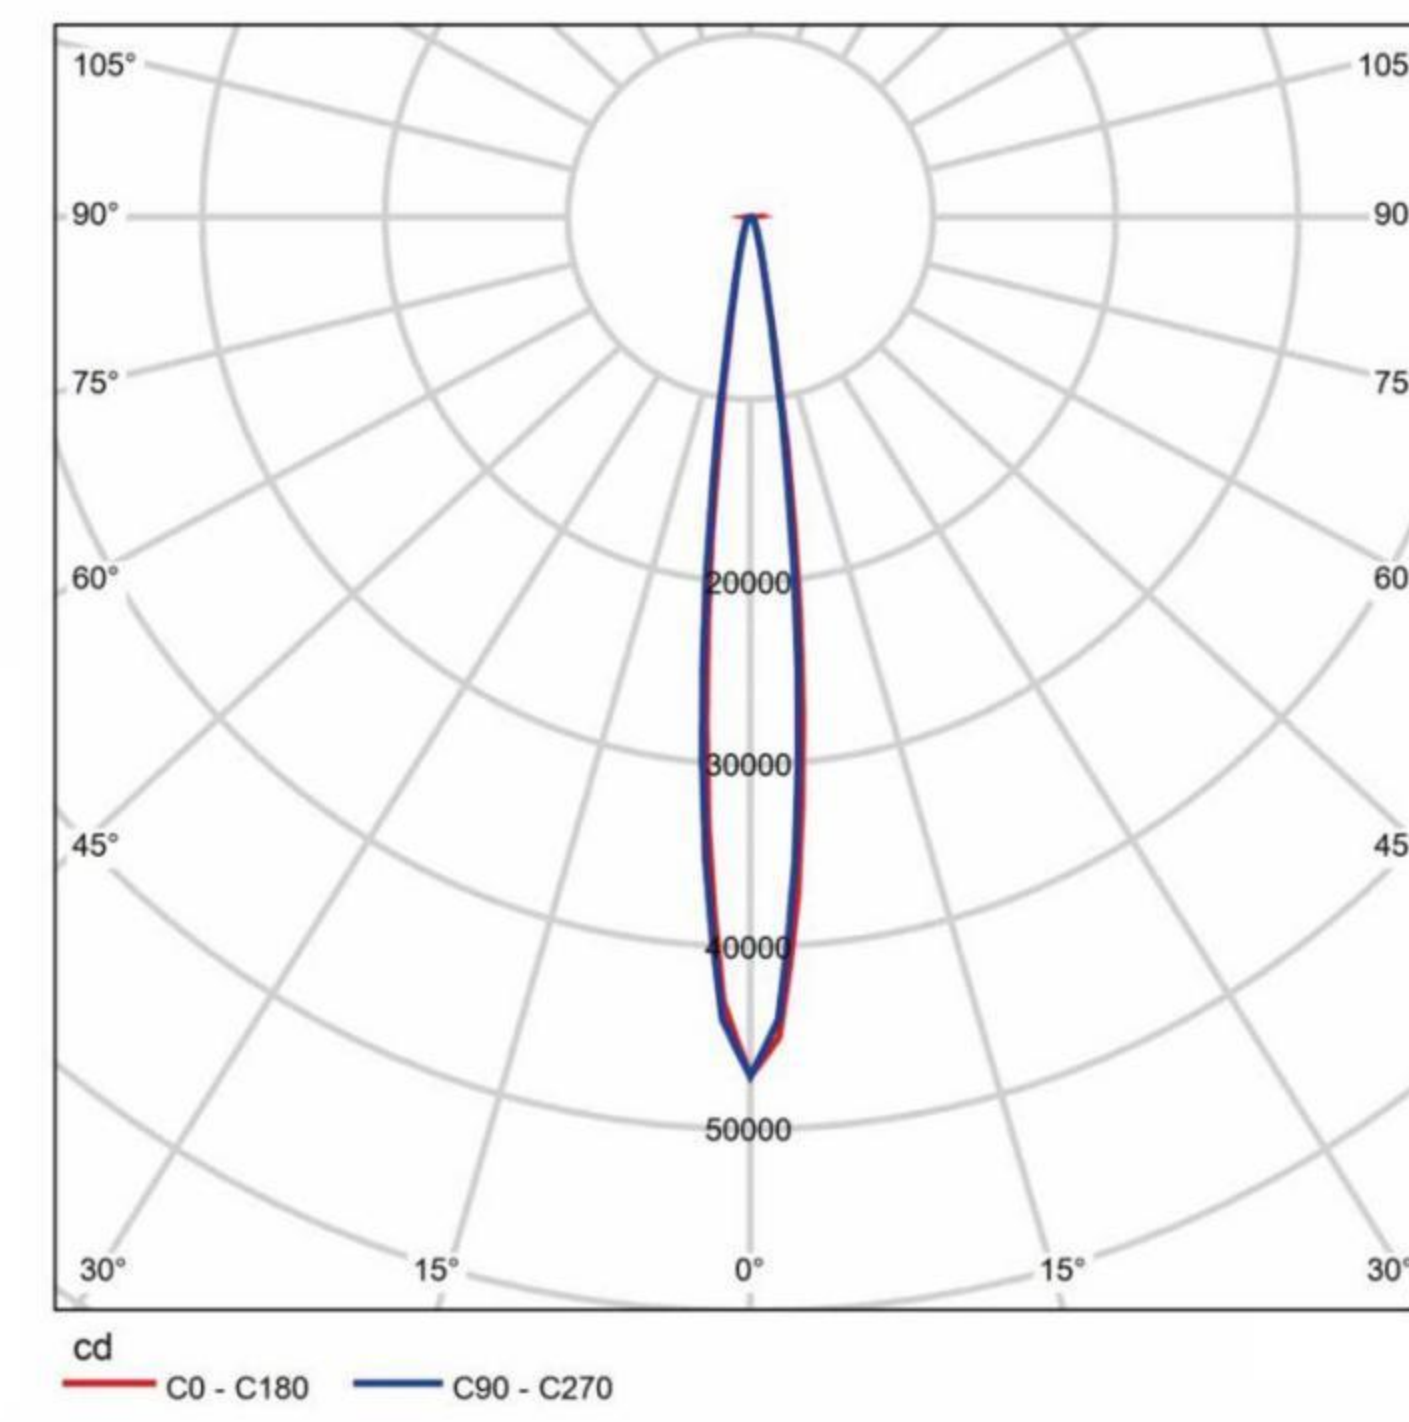


LBW96-72WA12
 Wall height: 5m
 Lamp distance from wall: 0.2m
 Lamp spacing: Continuous installation

LBW96-72WA18

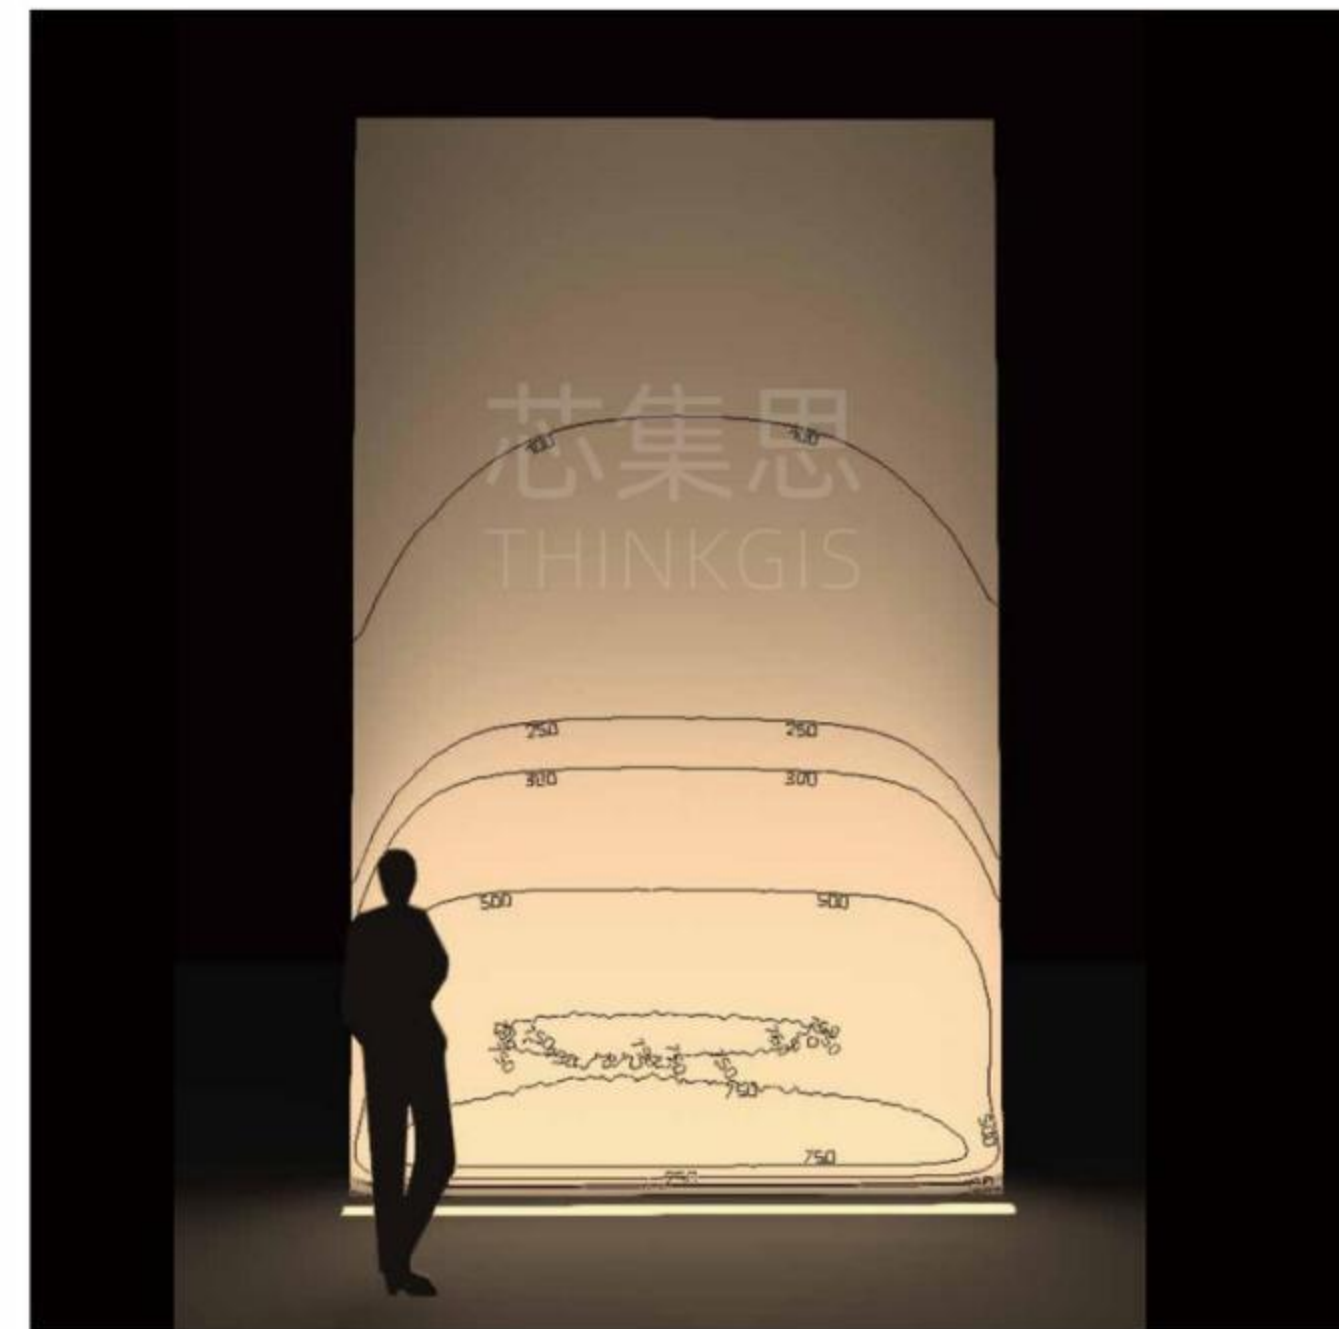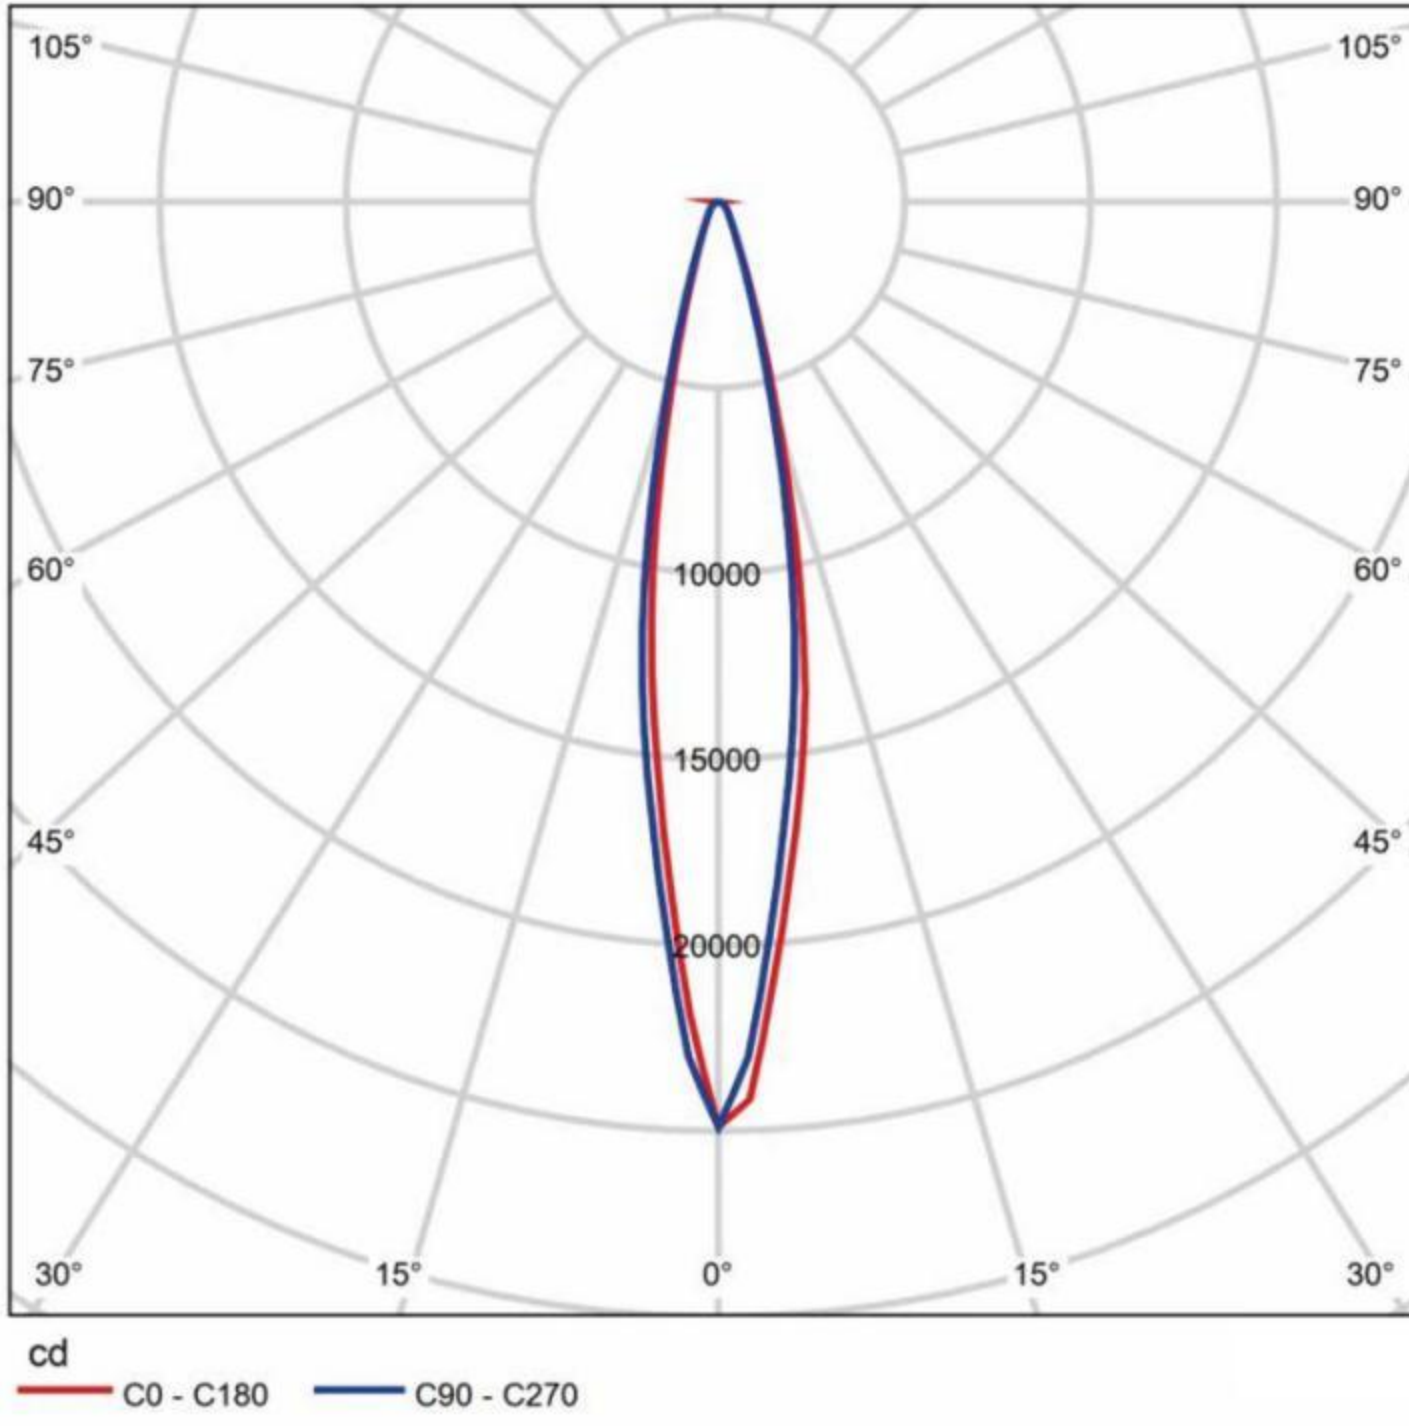


LBW96-72WA18
 Wall height: 5m
 Lamp distance from wall: 0.2m
 Lamp spacing: Continuous installation

LBW96-72WA0520

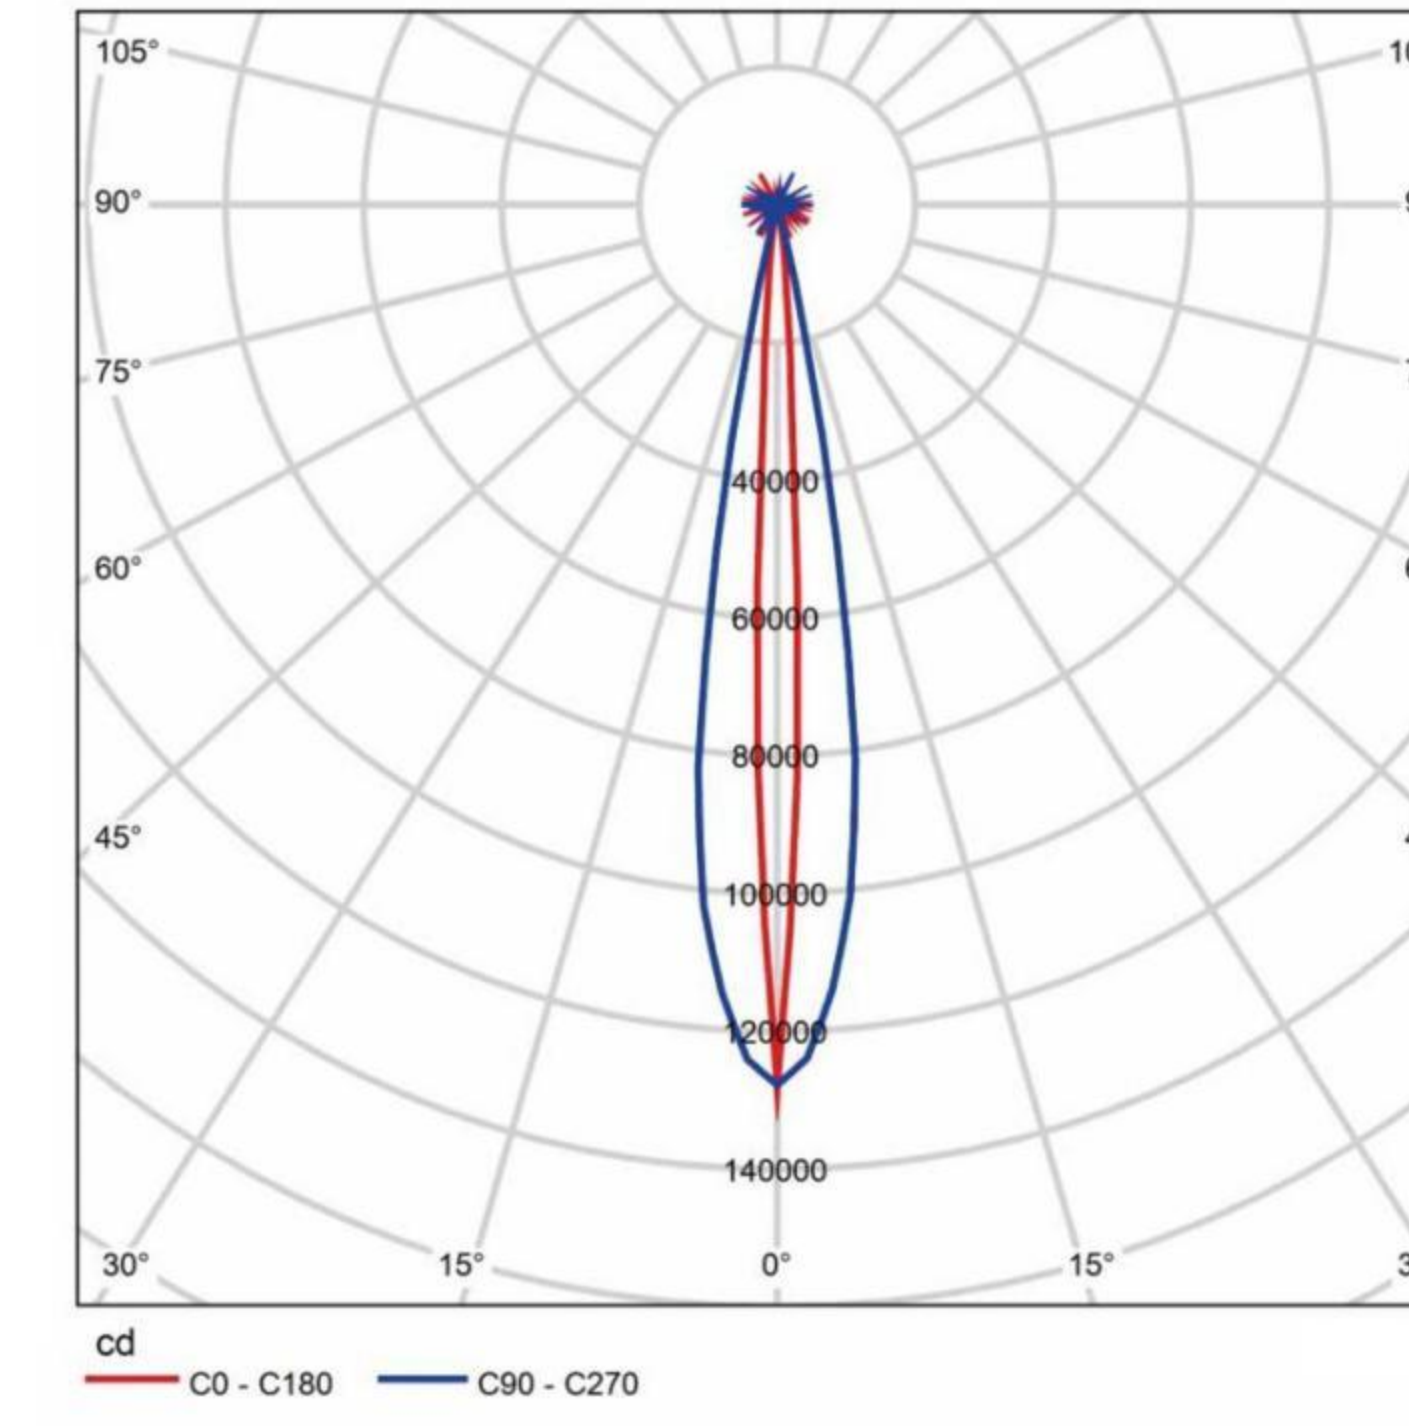

LBW96-72WA0520
 Wall height: 5m
 Lamp distance from wall: 0.2m
 Lamp spacing: Continuous installation

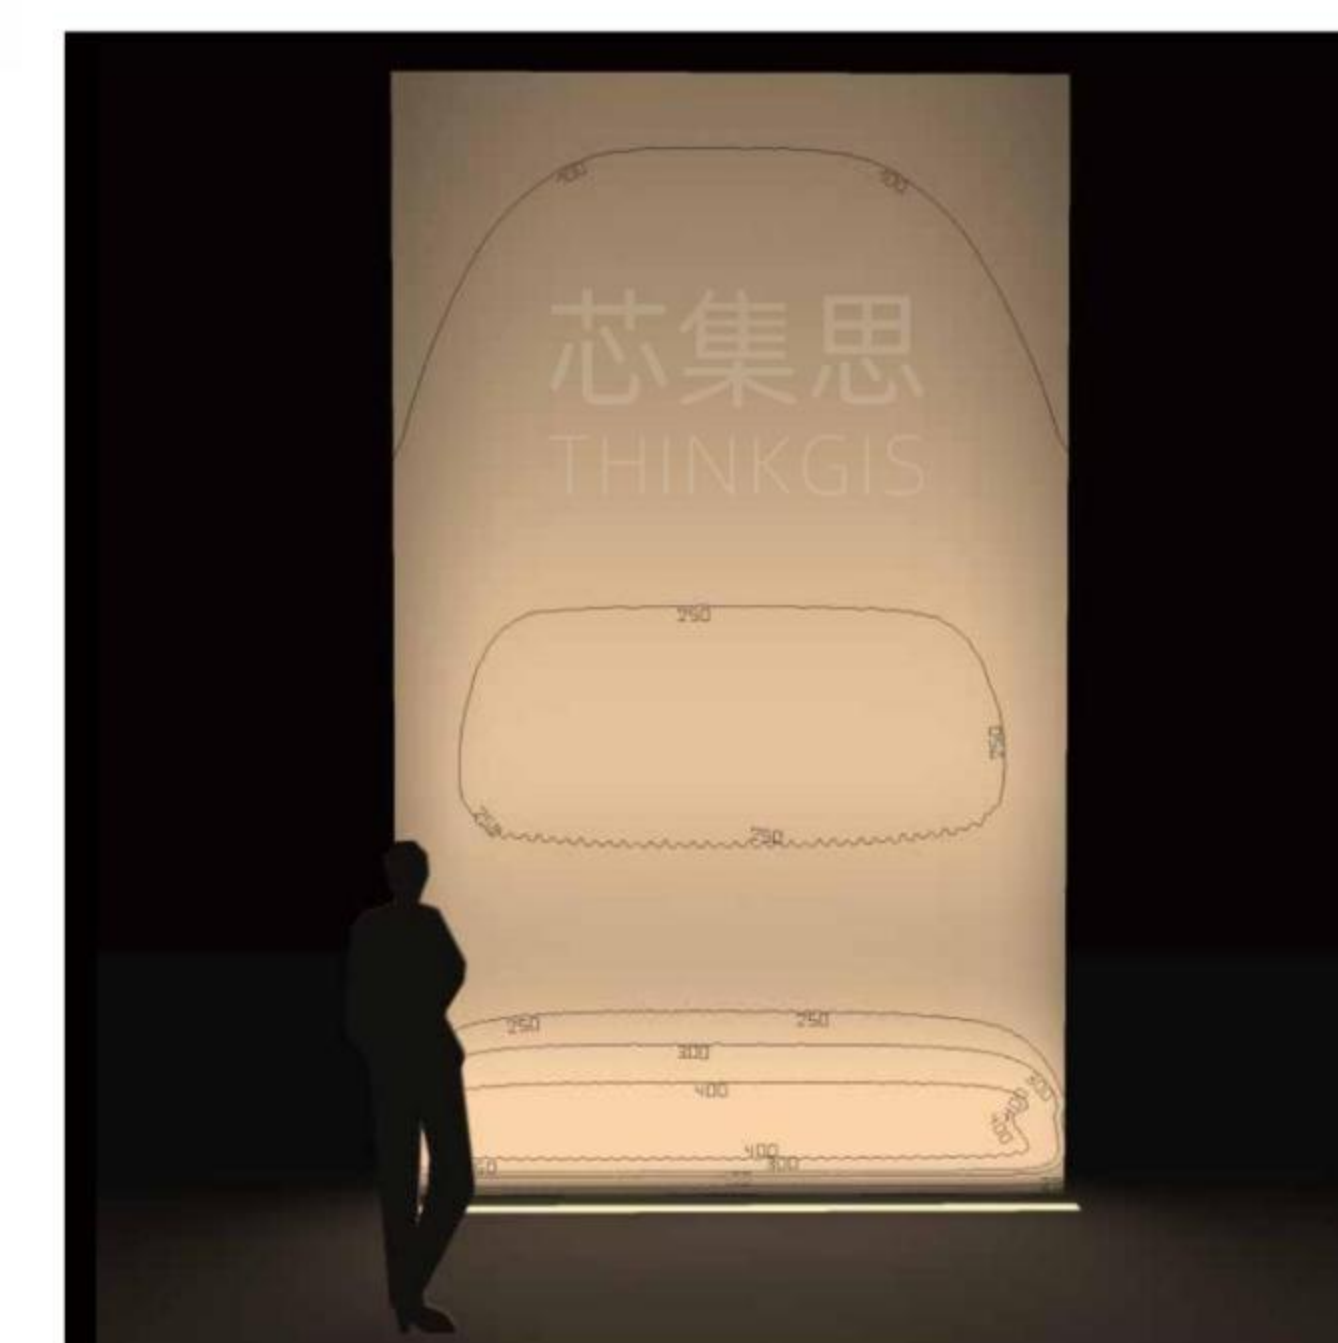

LBW96-72WA0520-P15
 Wall height: 5m
 Lamp distance from wall: 0.2m
 Lamp spacing: Continuous installation

Linear light

Floodlight

Downlight

Step light

Armrest light

Wall lamp

Lawn lamp

Garden light